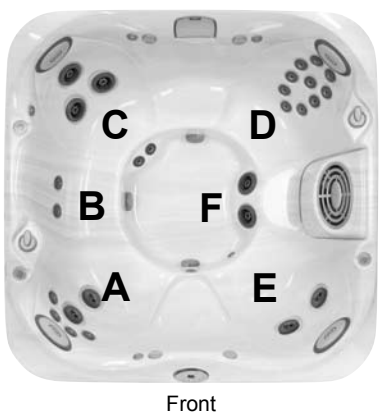


# Jacuzzi J-345

<b>Seating Capacity</b> .....	5-6 Adults	
<b>Dimensions</b> .....	84" x 84" x 36" (213.5 cm x 213.5 cm x 91.5 cm); <b>For Complete Dimensions, See page 41</b>	
<b>Dry Weight</b> .....	822 lbs (373 kg)	
<b>Filled Weight (Spa Volume)</b> .....	4,644 lbs (2,107 kg)	
<b>Filled Weight (Average Fill)</b> .....	3,661 lbs (1,661 kg)	
<b>Water Capacity (Spa Volume)</b> ...	458 US gallons (1,734 Liters)	
<b>Water Capacity (Average Fill)</b> ...	340 US gallons (1,287 Liters)	
<b>Electronic Controls</b> .....	Solid state electronic controls with LED read-out, programmable temperature, filtration, and heat cycles	
<b>Pump 1</b> .....	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 2-Speed, 2.0 HP continuous</b>	
<b>Pump 2</b> .....	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>	
<b>Circulation Pump</b> .....	Yes, 24-hour	
<b>Total PowerPro Jets</b> .....	<b>27</b>	
<b>Seat A</b> .....	4 PowerPro FX, 2 PowerPro FX2S	
<b>Seat B</b> .....	2 PowerPro FX	
<b>Seat C</b> .....	3 PowerPro MX, 2 PowerPro FX	
<b>Seat D</b> .....	10 PowerPro FX	
<b>Seat E</b> .....	2 PowerPro FX2S	
<b>Footwell (F)</b> .....	2 PowerPro MX	
<b>Massage Selectors</b> .....	2	
<b>Air Controls</b> .....	4, On/Off rocker style	
<b>Water Management System</b> .....	Two 60 ft <sup>2</sup> filter cartridges; filter 1 on 24-hour circulation pump; filter 2 on jets pump 1; optional CD ozone generator ready (Factory installed ozone injector)	
<b>LED Lighting</b> .....	One underwater ProLite with 4 color modes, one colored waterfall lights, cup holders, and backlit pillow insert with logo	
<b>Synthetic Cabinet Colors</b> .....	Autumn Red**, Silverwood, Roasted Chestnut, Brazilian Teak	
<b>Acrylic Colors</b> .....	Platinum, Sand, Sahara, Opal, Silver Pearl, Desert Sand, Slate Green, Cobalt**, or Graphite**	
<b>Headrests</b> .....	4	
<b>Waterfall</b> .....	One independent flow rate (on or off) adjustment; powered by pump 1	
<b>Electrical Requirements</b> .....	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@20A, 30A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>	
<b>Warranty*</b> .....	<b>North America (60 Hz):</b> 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years on Cabinet, 2 Years on Jets; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year on Cabinet, 1 Year on Jets</b>	
<b>Audio System (Optional)</b> .....	AM/FM/CD stereo receiver (MP3 player compatible) with four speakers, subwoofer, auxiliary audio jack for MP3 players, and standard wireless remote	

**Optional factory only installed jets with escutcheons**


\*\*Available while quantities last

\*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-345

## Massage Selector/Air Control Diagram

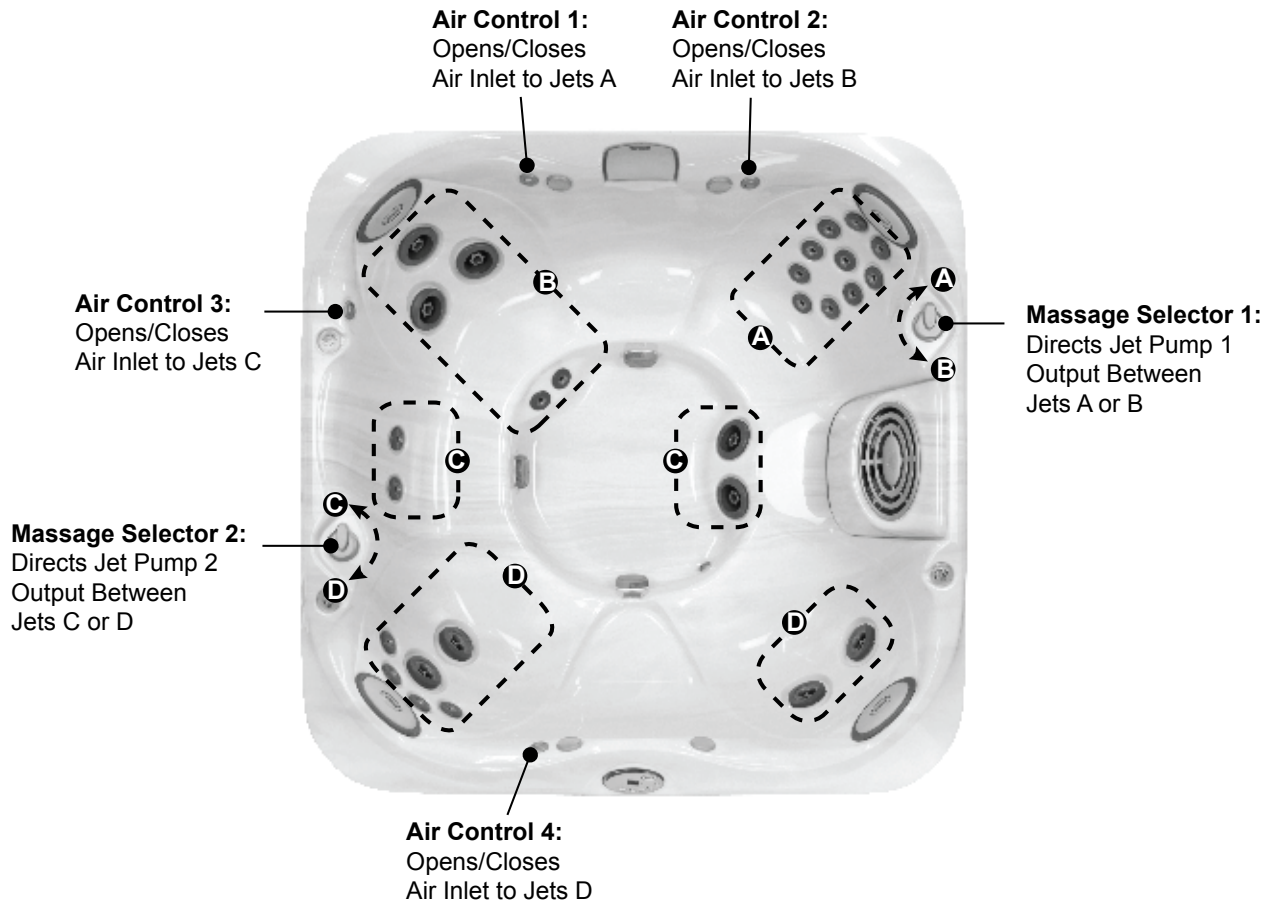

### 27 Total Jets



PowerPro  
FX Jets  
(18)



PowerPro  
FX2S  
Jets (4)



PowerPro  
MX Jets  
(5)

Spa Operation Subject to Change without Notice

## Seat Depths

A = 25.50" (64.8 cm)

B = 24.00" (60.1 cm)

C = 28.50" (72.4 cm)

D = 23.00" (58.4 cm)

E = 27.50" (69.9 cm)

F = 19.75" (50.2 cm)

G = 27.00" (58.6 cm)

H = 25.75" (65.4 cm)

I = 34.00" (86.4 cm)

Listed dimensions  
represent distance  
from top of acrylic to  
lowest point in seat.  
**Tolerance ± 0.5"**  
**(1.27 cm).**



Dimensions/Specifications are Subject to Change Without Notice