2004 Dimension and Specification Handbook

ProTech[™] Series

The spa illustrations below function as a virtual table of contents. Simply click on the spa of choice to immediately jump to that page. The table of contents in the following pages is also electronically linked for ease-of-use.



<u>J-385</u>



J-375



J-365



J-355



J-345



J-335



J-325



J-315

Jacuzzi.

PREMIUM

Important Safety Instructions - All Models



© 2004 Jacuzzi Premium. Jacuzzi Premium may make product modifications and enhancements. Therefore, specifications may change without notice. <u>Dimensions are approximate and for reference only.</u>



CAUTION: Always measure each spa for exact dimensions before designing its foundational support and/or decking.



When designing a foundational support, always account for the following load factors:

- 1. Filled spa weight, plus (+)
- 2. Combined occupant weight at the maximum seating capacity, plus (+)
- 3. Weight of the support decking, when applicable.




The technical data given in this publication is for reference only. It implies no warranty of any kind.

Table of Contents

J-385 Specifications	4
J-385 Jet Selector / Air Control Operation Diagram	
J-375 Specifications J-375 Jet Selector / Air Control Operation Diagram	6
o or o oot coloctor / / till collerer operation Blagram	
J-365 Specifications	9
J-355 Specifications	10
J-345 Specifications J-345 Jet Selector / Air Control Operation Diagram	
J-335 Specifications	
J-335 Jet Selector / Air Control Operation Diagram	15
J-325 Specifications	
J-315 Specifications J-315 Jet Selector / Air Control Operation Diagram	
Detailed Dimensions - All Models	20

Dimensions	.94" x 94" x 38" (239cm x 239cm x	
	97cm)	
Dry Weight	. 1,042 lbs (473kg)	
Filled Weight		
Water Capacity (Avg. Fill)		
	. Solid State, LCD User Interface Displays	
	Temperature, Time, Cycles and Fingertip	
	Jet Control. Offers Customizing of	
	Preprogrammed Filtration Cycles and	
	Water Temperature Setting. Also Includes	
	1 Remote Control Panel for Secondary	
	Jet Control.	
Pump 1	. 2-Speed, 4.2hp brake, 2.5hp continuous	
-	. 1-Speed, 4.2hp brake, 2.5hp continuous	
	. 1-Speed, 3.5hp brake, 2.0hp continuous	
Circulation Pump	Programmable for Daily Start Time and Du	ration
Total PowerPro Jets	.43	
Maxx PowerPro (MX)	.7	
PowerPro (LX)	7 Dimensions/Specifications are S	Subject to Change Without Notice
Mini PowerPro (FX)	. 27	and the control of th
Micro PowerPro (SX)	.2	
Jet Selectors	.2	
Air Controls	Five, On / Off Pushbutton Type	
Total Foot Jet Therapy		
Water Management System	Two 60ft² Filter Cartridges; Filter 1 on 24-H	
	on 2-Speed Pump 1; Ready for optional CL	•
	Ozone Dispersion Chamber Included in Sp	
Lighting	One Underwater LED ProLite with 7 Color I	Modes + Colored Waterfalls
Cabinet	Redwood/Cedar with No Stain; Optional U	
	Synthetic Plastic Cabinet with Embossed R	•
Acrylic Colors	.Textured Bluegrass, Jade, Marine, Onyx, S	
	Emerald, Platinum, or Sapphire; Solid Azur	e or Silver
Headrests		Nalissatura a satu Danna sa al lan
vvaterrans	.Two with Independent Flow Rate / On-Off A	Adjustment, Powered by
Floatrical Paguiroments	Pump 1 North American 60Hz Models: 240 VAC @	101 501 or 601
Electrical Requirements	North American 60Hz Models: 240 VAC @	
	Export 50Hz Models: 230-240 VAC @ 35/ circuit breaker to comply with local elec	•
	countries may require dual power inputs	
	for this configuration.	s, two breakers are required
Warranty	North American 60Hz Models: 10 Years Sh	ell 7 Vears Shell Surface
Trainer !	5 Years for Plumbing Component Leaks, 5	
	Controls; Export 50Hz Models: 2 Years Pl	
	2 Years Equipment & Controls	and,
Seating Capacity	• •	
•		Un Speakers
Audio System (Oblionai)	AM/FM/CD Stereo Receiver with Dual Pop-	-UD SDEAKEIS

Jet Selector / Air Control Diagram

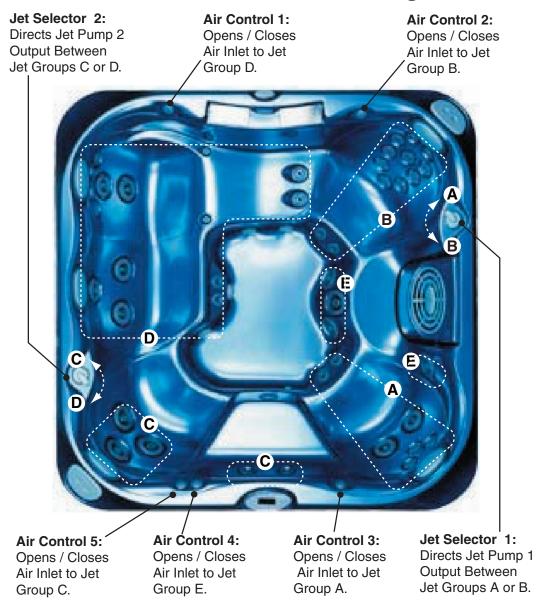


Foot And Side Wall Jets E Powered by Jet Pump 3

Seat Depths

A = 27.00" (68.6cm)
B = 23.00" (58.4cm)
C = 28.50" (72.4cm)
D = 22.75" (57.8cm)


E = 26.50" (67.3cm)

F = 17.50" (44.5cm) G = 27.50" (69.9cm) H = 27.00" (68.6cm) I = 33.50" (85.1cm) Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.



Dimensions	.91" x 91" x 38" (231cm x 231cm x
	97cm)
Dry Weight	
Filled Weight	
Water Capacity (Avg. Fill)	
Electronic Controls	. Solid State, LCD User Interface Displays
	Temperature, Time, Cycles and Fingertip
	Jet Control. Offers Customizing of
	Preprogrammed Filtration Cycles and
	Water Temperature Setting. Also Includes
	1 Remote Control Panel for Secondary
	Jet Control.
Pump 1	. 2-Speed, 4.2hp brake, 2.5hp continuous
Pump 2	.1-Speed, 4.2hp brake, 2.5hp continuous
Pump 3	. N/A
	Programmable for Daily Start Time and Duration
Total PowerPro Jets	.34
Maxx PowerPro (MX)	
PowerPro (LX)	
Mini PowerPro (FX)	
Micro PowerPro (SX)	
Jet Selectors	
Air Controls	**
Total Foot Jet Therapy	
Water Management System	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2
	on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in
	Ozone Dispersion Chamber Included in Spa)
	One Underwater LED ProLite with 7 Color Modes + Colored Waterfalls
Cabinet	Redwood/Cedar with No Stain; Optional UV Resistant
	Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain
Acrylic Colors	Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled
	Emerald, Platinum, or Sapphire; Solid Azure or Silver
Headrests	
Waterfalls	Two with Independent Flow Rate / On-Off Adjustment; Powered by
Flootrical Bassinamanta	Pump 1
Electrical Requirements	North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A
	Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated
	circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two breakers are required
	for this configuration.
Warranty	North American 60Hz Models: 10 Years Shell, 7 Years Shell Surface,
warranty	5 Years for Plumbing Component Leaks, 5 Years Equipment &
	Controls; Export 50Hz Models: 2 Years Plumbing Component Leaks,
	2 Years Equipment & Controls
Seating Capacity	6 - 7
•	AM/FM/CD Stereo Receiver with Dual Pop-Up Speakers
• • • • • • • • • • • • • • • • • • • •	· · ·
Dimer	nsions/Specifications are Subject to Change Without Notice

Jet Selector / Air Control Diagram

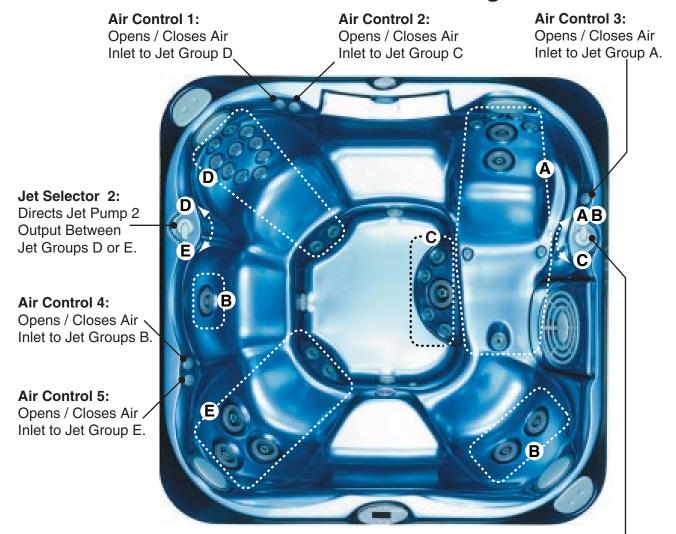

Jet Selector 1:
Directs Jet Pump 1 Output
Between Jet Groups A&B or C.

Seat Depths

A = 28.75" (73.0cm) B = 21.50" (54.6cm)

C = 26.75" (67.9cm)

D = 22.50" (57.2cm)

E = 26.00" (66.0cm)


F = 19.00" (48.3cm) G = 27.00" (68.6cm)

H = 26.50" (67.3cm)

I = 34.00" (86.4cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest

Point in Seat.



Dimensions	91" x 84" x 38" (231cm x 213cm x
	97cm)
Dry Weight	
Filled Weight	
Water Capacity (Avg. Fill)	
	Solid State, LCD User Interface Displays
	Temperature, Time, Cycles and Fingertip
	Jet Control. Offers Customizing of
	Preprogrammed Filtration Cycles and
	Water Temperature Setting. Also Includes
	1 Remote Control Panel for Secondary
	Jet Control.
Pump 1	2-Speed, 4.2hp brake, 2.5hp continuous
	1-Speed, 4.2hp brake, 2.5hp continuous
Pump 3	
Circulation Pump	Programmable for Daily Start Time and Duration
Total PowerPro Jets	30
Maxx PowerPro (MX)	
PowerPro (LX)	5
Mini PowerPro (FX)	
Micro PowerPro (SX)	
Jet Selectors	
Air Controls	Five On / Off Pushbutton Type
	•
Total Foot Jet Therapy	4
Total Foot Jet Therapy	4 Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2
Total Foot Jet Therapy	4 Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in
Total Foot Jet Therapy Water Management System	4 Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa)
Total Foot Jet Therapy	4 Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall
Total Foot Jet Therapy	4 Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant
Total Foot Jet Therapy Water Management System Lighting Cabinet	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain
Total Foot Jet Therapy Water Management System Lighting Cabinet	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled
Total Foot Jet Therapy Water Management System Lighting Cabinet Acrylic Colors	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled Emerald, Platinum, or Sapphire; Solid Azure or Silver
Total Foot Jet Therapy Water Management System Lighting Cabinet Acrylic Colors Headrests	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled Emerald, Platinum, or Sapphire; Solid Azure or Silver
Total Foot Jet Therapy Water Management System Lighting Cabinet Acrylic Colors Headrests	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled Emerald, Platinum, or Sapphire; Solid Azure or Silver 4 One with Independent Flow Rate / On-Off Adjustmenr; Powered by
Total Foot Jet Therapy Water Management System Lighting Cabinet Acrylic Colors Headrests Waterfall	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled Emerald, Platinum, or Sapphire; Solid Azure or Silver 4 One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1
Total Foot Jet Therapy Water Management System Lighting Cabinet Acrylic Colors Headrests Waterfall	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled Emerald, Platinum, or Sapphire; Solid Azure or Silver 4 One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A
Total Foot Jet Therapy Water Management System Lighting Cabinet Acrylic Colors Headrests Waterfall	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled Emerald, Platinum, or Sapphire; Solid Azure or Silver 4 One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated
Total Foot Jet Therapy Water Management System Lighting Cabinet Acrylic Colors Headrests Waterfall	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled Emerald, Platinum, or Sapphire; Solid Azure or Silver 4 One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain
Total Foot Jet Therapy Water Management System Lighting Cabinet Acrylic Colors Headrests Waterfall	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled Emerald, Platinum, or Sapphire; Solid Azure or Silver 4 One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two breakers are required
Total Foot Jet Therapy Water Management System Lighting Cabinet Acrylic Colors Headrests Waterfall	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled Emerald, Platinum, or Sapphire; Solid Azure or Silver 4 One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain
Total Foot Jet Therapy	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled Emerald, Platinum, or Sapphire; Solid Azure or Silver 4 One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two breakers are required for this configuration.
Total Foot Jet Therapy	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled Emerald, Platinum, or Sapphire; Solid Azure or Silver 4 One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two breakers are required for this configuration. North American 60Hz Models: 10 Years Shell, 7 Years Shell Surface,
Total Foot Jet Therapy	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled Emerald, Platinum, or Sapphire; Solid Azure or Silver 4 One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two breakers are required for this configuration. North American 60Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment &
Total Foot Jet Therapy	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled Emerald, Platinum, or Sapphire; Solid Azure or Silver 4 One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two breakers are required for this configuration. North American 60Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls; Export 50Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls
Total Foot Jet Therapy	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in Ozone Dispersion Chamber Included in Spa) One Underwater LED ProLite with 7 Color Modes + Colored Waterfall Redwood/Cedar with No Stain; Optional UV Resistant Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled Emerald, Platinum, or Sapphire; Solid Azure or Silver 4 One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two breakers are required for this configuration. North American 60Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls; Export 50Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls

Jet Selector / Air Control Diagram

Air Control 1: Opens / Closes Air Inlet to Jet

Group B

Air Control 2: Opens / Closes

Air Inlet to Foot Jet Group D

Air Control 3:

Opens / Closes Air Inlet to Jet Group A



Jet Selector 2: Directs Jet Pump 2 _ Output Between Jet Groups C or E.

Air Control 4: Opens / Closes
Air Inlet to All

Seat Jets C

Air Control 5: / Opens / Closes Air Inlet to All Seat Jets E Jet Selector 1: Directs Jet Pump 1 Output Between Jet Groups A or B.

Note: Footwell Jets D are always on when Pump 2 is activated.

Seat Depths

A = 25.00" (63.5cm)B = 23.25" (59.1cm)

C = 28.00" (71.1cm)

D = 22.50" (57.2cm)


E = 27.00" (68.6cm)

F = 19.25" (48.9cm)G = 26.50" (67.3cm)

H = 25.25" (64.1cm)


I = 33.50" (85.1cm)

Listed Dimensions
Represent Distance from
Top of Acrylic to Lowest
Point in Seat.



Dimensions	.91" x 84" x 38" (231cm x 213cm x
	97cm)
Dry Weight	
Filled Weight	
Water Capacity (Avg. Fill)	
Electronic Controls	Solid State, LCD User Interface Displays
	Temperature, Time, Cycles and Fingertip
	Jet Control. Offers Customizing of
	Preprogrammed Filtration Cycles and
	Water Temperature Setting. Also Includes
	1 Remote Control Panel for Secondary
	Jet Control.
Pump 1	. 2-Speed, 4.2hp brake, 2.5hp continuous
	. 1-Speed, 4.2hp brake, 2.5hp continuous
Pump 3	
-	Programmable for Daily Start Time and Duration
Total PowerPro Jets	
Maxx PowerPro (MX)	<i>.</i> 5
PowerPro (LX)	
Mini PowerPro (FX)	
Micro PowerPro (SX)	.N/A
Jet Selectors	
Air Controls	Four, On / Off Pushbutton Type
Total Foot Jet Therapy	.2
Water Management System	.Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2
	on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in
	Ozone Dispersion Chamber Included in Spa)
	One Underwater LED ProLite with 7 Color Modes + Colored Waterfall
Cabinet	Redwood/Cedar with No Stain; Optional UV Resistant
	Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain
Acrylic Colors	Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled
	Emerald, Platinum, or Sapphire; Solid Azure or Silver
	• •
Headrests	.3
	.3 .One with Independent Flow Rate / On-Off Adjustmenr; Powered by
Waterfall	.3 .One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1
Waterfall	.3 .One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 .North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A
Waterfall	.3 .One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 .North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated
Waterfall	.3 .One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 .North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain
Waterfall	.3 .One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 .North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two breakers are required
Waterfall Electrical Requirements	.3 .One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 .North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two breakers are required for this configuration.
Waterfall	.3 .One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 .North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two breakers are required for this configuration. North American 60Hz Models: 10 Years Shell, 7 Years Shell Surface,
Waterfall Electrical Requirements	.3 .One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 .North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two breakers are required for this configuration. North American 60Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment &
Waterfall Electrical Requirements	.3 .One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 .North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two breakers are required for this configuration. North American 60Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls; Export 50Hz Models: 2 Years Plumbing Component Leaks,
Waterfall Electrical Requirements Warranty	.3 .One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 .North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two breakers are required for this configuration. North American 60Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls; Export 50Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls
Waterfall Electrical Requirements Warranty Seating Capacity	.3 .One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 .North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two breakers are required for this configuration. North American 60Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls; Export 50Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls
Waterfall Electrical Requirements Warranty Seating Capacity Audio System (Optional)	.3 .One with Independent Flow Rate / On-Off Adjustmenr; Powered by Pump 1 .North American 60Hz Models: 240 VAC @ 40A, 50A, or 60A Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two breakers are required for this configuration. North American 60Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls; Export 50Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls

Jet Selector / Air Control Diagram

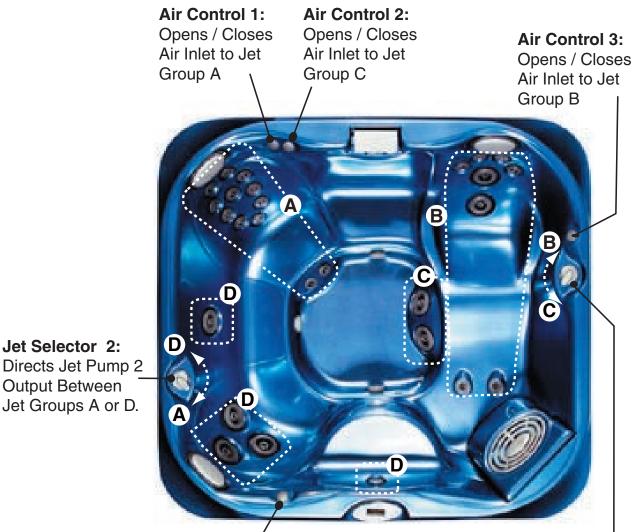

Air Control 4: Opens / Closes Air Inlet to Jet

Group D

Jet Selector 1: Directs Jet Pump 1 Output Between Jet Groups B or C.

Seat Depths

A = 29.00" (73.6cm)B = 21.75" (55.2cm)C = 27.00" (68.6cm)

Jet Selector 2:

Output Between


D = 22.75" (57.8cm)

E = 13.75" (34.9cm)

F = 27.50" (69.9cm)G = 26.50" (67.3cm)

H = 33.25" (84.5cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.



Dimensions	.84" x 84" x 36" (213cm x 213cm x	
	92cm)	
Dry Weight		
Filled Weight	.3,611 lbs (1,638kg)	
Water Capacity (Avg. Fill)	.336 US gallons (1,272 Liters)	
Electronic Controls	Solid State Electronic Controls with LED	
	Readout, Programmable Temperature,	
	Filtration, and Heat Cycles	
Pump 1	2-Speed, 4.2hp brake, 2.5hp continuous	6.0
	1-Speed, 4.2hp brake, 2.5hp continuous	0
Pump 3		
Circulation Pump		
Total PowerPro Jets		
Maxx PowerPro (MX)	.5	
PowerPro (LX)		
Mini PowerPro (FX)		
Micro PowerPro (SX)		
Jet Selectors		
Air Controls	.Four. On / Off Pushbutton Type	
Total Foot Jet Therapy	* *	
	.Two 60ft ² Filter Cartridges; Filter 1 on 24-	Hour Circulation Pump; Filter 2
3	on 2-Speed Pump 1; Ready for optional C	•
	Ozone Dispersion Chamber Included in S	•
Lighting	One Underwater with Two Colored Lense	,
	Redwood/Cedar with No Stain; Optional L	
	Synthetic Plastic Cabinet with Embossed	
Acrylic Colors	Textured Bluegrass, Jade, Marine, Onyx,	•
	Emerald, Platinum, or Sapphire; Solid Azu	
Headrests		
	. Includes Flow Rate / On-Off Adjustment; I	Powered by Pump 1
	North American 60Hz Models: 240 VAC @	
	Export 50Hz Models: 230-240 VAC @ 3	
	circuit breaker to comply with local ele	
	countries may require dual power inpu	
	for this configuration.	to, the broakers are required
Warranty	North American 60Hz Models: 10 Years S	hell 7 Vears Shell Surface
Trainancy	5 Years for Plumbing Component Leaks,	
	Controls; Export 50Hz Models: 2 Years	
	2 Years Equipment & Controls	idinaling Component Leaks,
Spating Capacity	4 - 5	
Seating Capacity		n IIn Sneakers
Audio System (Optional)	AM/FM/CD Stereo Receiver with Dual Po	u-up speakers

Jet Selector / Air Control Diagram

Air Control 1: Opens / Closes Air Inlet to Jet Group A Air Control 2: Opens / Closes Air Inlet to Jet Group C Air Control 3: Opens / Closes Air Inlet to Jet Group B

Jet Selector 2: — Directs Jet Pump 2 Output Between Jet Groups C or D.

Air Control 4: Opens / Closes Air Inlet to Jet Group D



Jet Selector 1: IDirects Jet Pump 1
Output Between Jet
Groups A or B.

Seat Depths

A = 25.50" (64.8cm) B = 24.00" (60.1cm)

C = 28.50" (72.4cm)

D = 23.00" (58.4cm)


E = 27.50" (69.9cm)

F = 19.75" (50.2cm)G = 27.00" (58.6cm)

H = 25.75" (65.4cm)

I = 34.00" (86.4cm)

Listed Dimensions
Represent Distance from
Top of Acrylic to Lowest
Point in Seat.



Dimensions	94" v 94" v 36" /313am v 313am v	
Dimensions	84" x 84" x 36" (213cm x 213cm x 91cm)	
Dry Woight	,	
Dry Weight Filled Weight		The state of the s
•	• • • • • • • • • • • • • • • • • • • •	
Water Capacity (Avg. Fill)	Solid State Electronic Controls with LED	
Electronic Controls	Readout, Programmable Temperature,	
	Filtration, and Heat Cycles	
Pump 1	. 2-Speed, 4.2hp brake, 2.5hp continuous	
-	·	
Pump 2		
Pump 3		
Circulation Pump Total PowerPro Jets		
Maxx PowerPro (MX)		
PowerPro (LX)		
Mini PowerPro (FX)		
Micro PowerPro (SX)		
Jet Selectors		
	Three, On / Off Pushbutton Type	
Total Foot Jet Therapy		
water wanagement System	Two 60ft ² Filter Cartridges; Filter 1 on 24-	•
	on 2-Speed Pump 1; Ready for optional C	•
	Ozone Dispersion Chamber Included in S	. ,
	One Underwater with Two Colored Lenses	
Cabinet	.Redwood/Cedar with No Stain; Optional L	
	Synthetic Plastic Cabinet with Embossed	•
Acrylic Colors	Textured Bluegrass, Jade, Marine, Onyx,	
	Emerald, Platinum, or Sapphire; Solid Azu	ire or Silver
Headrests		_ ,, _ ,
	. Includes Flow Rate / On-Off Adjustment; F	
Electrical Requirements	. North American 60Hz Models: 240 VAC @	
	Export 50Hz Models: 230-240 VAC @ 35	
	circuit breaker to comply with local ele	
	countries may require dual power inpu	ts; two breakers are required
	for this configuration.	
Warranty	North American 60Hz Models: 10 Years S	
	5 Years for Plumbing Component Leaks,	
	Controls; Export 50Hz Models: 2 Years I	Plumbing Component Leaks,
	2 Years Equipment & Controls	
Seating Capacity	5	
Audio System (Optional)	AM/FM/CD Stereo Receiver with Dual Po	o-Up Speakers

Jet Selector / Air Control Diagram


Air Control 1:

Opens / Closes Air Inlet to Jet

Jet Selector:

Directs Jet Pump Output Between Jet Groups A&B or C.



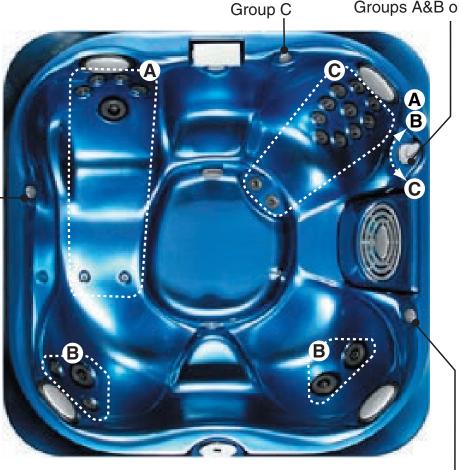

Air Control 3: Opens / Closes Air Inlet to Jet Group B

Seat Depths

A = 26.50" (67.3cm)B = 24.00" (60.1cm)

C = 28.75" (73.0cm)


D = 23.00" (58.4cm)

E = 27.50" (69.9cm)

F = 19.75" (50.2cm)G = 27.00" (68.6cm)

H = 34.00" (86.4cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.



Dimensions	84" x 76" x 34" (213cm x 193cm x
Dinignatoria	86cm)
Dry Weight	
Filled Weight	
Water Capacity (Avg. Fill)	
	Solid State Electronic Controls with LED
	Readout, Programmable Temperature,
	Filtration, and Heat Cycles
Pump 1	. 2-Speed, 2.0hp brake, 1.5hp continuous
Pump 2	
Pump 3	
Circulation Pump	
Total PowerPro Jets	
Maxx PowerPro (MX)	
PowerPro (LX)	
Mini PowerPro (FX)	
Micro PowerPro (SX)	
Jet Selectors	
	Three, On / Off Pushbutton Type
Total Foot Jet Therapy	•
	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2
	on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in
	Ozone Dispersion Chamber Included in Spa)
Lighting	One Underwater with Two Colored Lenses
	.Redwood/Cedar with No Stain; Optional UV Resistant
	Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain
Acrylic Colors	Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled
•	Emerald, Platinum, or Sapphire; Solid Azure or Silver
Headrests	
Waterfall	.Includes Flow Rate / On-Off Adjustment; Powered by Pump 1
	North American 60Hz Models: 120 VAC @ 15A or 240 VAC @ 30A or
	40A, Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably
	rated circuit breaker to comply with local electrical codes. Certain
	countries may require dual power inputs; two breakers are required
	for this configuration.
Warranty	North American 60Hz Models: 10 Years Shell, 7 Years Shell Surface,
	5 Years for Plumbing Component Leaks, 5 Years Equipment &
	Controls; Export 50Hz Models: 2 Years Plumbing Component Leaks,
	2 Years Equipment & Controls
Seating Capacity Audio System (Optional)	2 Years Equipment & Controls 4


Jet Selector / Air Control Diagram

Air Control 1: Opens / Closes Air Inlet to Jet

Jet Selector: Directs Jet Pump

Jet Groups A or B&C

Air Control 3: Opens / Closes Air Inlet to Jet Group C

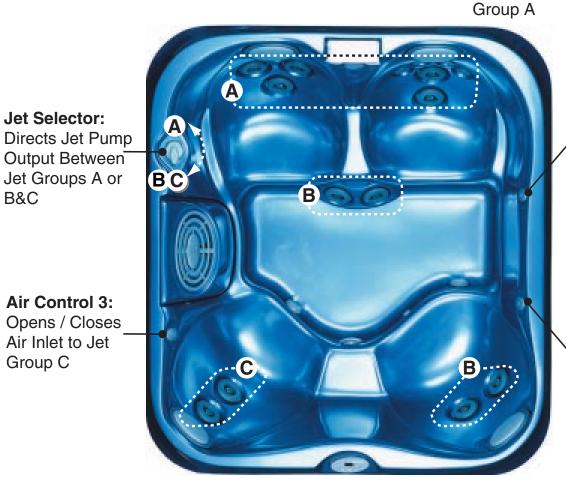

Air Control 2: Opens / Closes Air Inlet to Jet Group B

Seat Depths

A = 27.00" (68.6cm)

B = 27.25" (69.2cm)


C = 25.75" (65.4cm)

D = 21.50" (54.6cm)

E = 28.00" (71.1cm)

F = 31.25" (79.4cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.



Dimensions	76" v 66" v 20" /102cm v 169cm v
Differsions	.76" x 66" x 32" (193cm x 168cm x
Dur. Mainht	81cm)
Dry Weight	
Filled Weight	
Water Capacity (Avg. Fill)	Solid State Electronic Controls with LED
Electronic Controls	
	Readout, Programmable Temperature,
Duman 4	Filtration, and Heat Cycles
•	2-Speed, 2.0hp brake, 1.5hp continuous
Pump 2	
Pump 3	
Circulation Pump	
Total PowerPro Jets	
Maxx PowerPro (MX)	
PowerPro (LX)	
Mini PowerPro (FX)	
Micro PowerPro (SX)	
Jet Selectors	
Air Controls	•
Total Foot Jet Therapy	
Water Management System	Two 60ft ² Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2
	on 2-Speed Pump 1; Ready for optional CD Ozone Generator (Built-in
	Ozone Dispersion Chamber Included in Spa)
	One Underwater with Two Colored Lenses
Cabinet	Redwood/Cedar with No Stain; Optional UV Resistant
	Synthetic Plastic Cabinet with Embossed Red or Gray Wood Grain
Acrylic Colors	Textured Bluegrass, Jade, Marine, Onyx, Sahara, or Sand; Marbled
	Emerald, Platinum, or Sapphire; Solid Azure or Silver
Headrests	
	Includes Flow Rate / On-Off Adjustment; Powered by Pump 1
Electrical Requirements	North American 60Hz Models: 120 VAC @ 15A or 240 VAC @ 30A or
	40A, Export 50Hz Models: 230-240 VAC @ 35A or 40A, or suitably
	rated circuit breaker to comply with local electrical codes. Certain
	countries may require dual power inputs; two breakers are required
	for this configuration.
Warranty	North American 60Hz Models: 10 Years Shell, 7 Years Shell Surface,
	5 Years for Plumbing Component Leaks, 5 Years Equipment &
	Controls; Export 50Hz Models: 2 Years Plumbing Component Leaks,
	2 Years Equipment & Controls
Seating Capacity	3
Audio System (Optional)	N/A

Jet Selector / Air Control Diagram

Jet Selector:

Directs Jet Pump Output Between Jet Groups A or B **Air Control 1:**

Opens / Closes Air Inlet to Jet Group A

В


Air Control 2: Opens / Closes Air Inlet to Jet Group B

Seat Depths

A = 26.50" (67.3cm) B = 28.00" (71.1cm) C = 27.00" (68.6cm) D = 28.00" (71.1cm)


E = 27.75" (70.5cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.




Detailed Dimensions - All Models


SPA			DIMENSIONS A - E		
MODEL	Α	В	С	D	E
J-385	94" (238.8cm)	94" (238.8cm)	31.75" (80.6cm)	38" (96.5cm)	66.75" (169.5cm)
J-375	91" (231.1cm)	91" (231.1cm)	31.75" (80.6cm)	38" (96.5cm)	64.50" (163.8cm)
J-365	84" (213.4cm)	91" (231.1cm)	31.75" (80.6cm)	38" (96.5cm)	64.50" (163.8cm)
J-355	84" (213.4cm)	91" (231.1cm)	31.75" (80.6cm)	38" (96.5cm)	64.50" (163.8cm)
J-345	84" (213.4cm)	84" (231.1cm)	30.00" (76.2cm)	36" (91.4cm)	57.50" (146.1cm)
J-335	84" (213.4cm)	84" (213.4cm)	29.75" (75.6cm)	36" (91.4cm)	57.50" (146.1cm)
J-325	84" (213.4cm)	76" (193.0cm)	28.00" (71.1cm)	34" (86.4cm)	50.25" (127.6cm)
J-315	66" (167.6cm)	76" (193.0cm)	26.00" (66.0cm)	32" (81.3cm)	49.63" (126.1cm)
			DIMENSIONS F - J		
	F	G	Н	I	J
J-385	N/A	N/A	38.00" (96.5cm)	5.00" (12.7cm)	67.50" (171.5cm)
J-375	N/A	N/A	32.50" (82.6cm)	7.00" (17.8cm)	64.50" (163.8cm)
J-365	N/A	N/A	34.50" (87.6cm)	8.00" (20.3cm)	57.63" (146.4cm)
J-355	N/A	N/A	37.50" (95.3cm)	10.00" (25.4cm)	57.50" (146.1cm)
J-345	N/A	N/A	32.50" (82.6cm)	8.00" (20.3cm)	57.50" (146.1cm)
J-335	28.00" (71.1cm)	5.50" (14.0cm)	N/A	N/A	57.50" (146.1cm)
J-325	N/A	N/A	28.00" (71.1cm)	6.00" (15.2cm)	57.38" (145.7cm)
J-315	34.00" (86.4cm)	9.00" (22.9cm)	N/A	N/A	39.63" (100.7cm)




Spa Top View (J-385 Illustrated) Acrylic Shell Radius: 12" (30cm), 4-Corners Control Panel Side



Control Panel Side View (All Models)




*Bottom Conduit Port Access Dimensions - Optional



*Drill Hole "Here" Location for Bottom Conduit Access Through Plastic Pan. Note: Dimensions G & I Are from Front Edge of Spa Frame on Main Control Panel Side.

Left | Right Side View (All Models)







14525 Monte Vista Ave. • Chino, CA 91710 Website: http://www.jacuzzipremium.com