
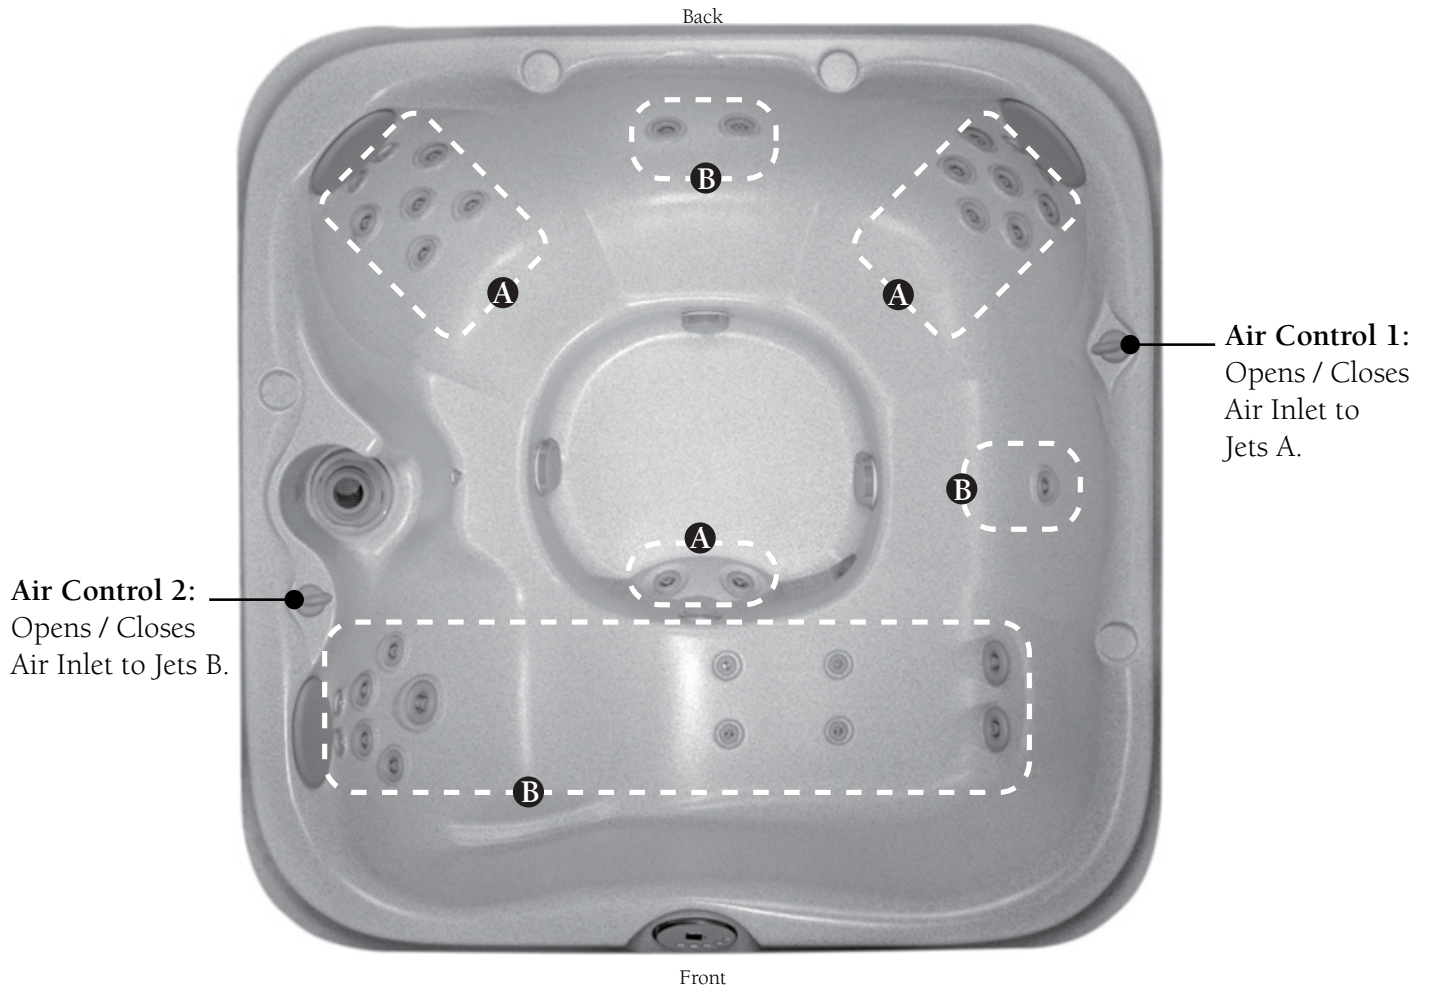


Jacuzzi J-230

| | | |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Seating Capacity..... | 5 Adults |  |
| Dimensions | 84" x 84" x 36" (213cm x 213cm x 91cm); For Complete Dimensions, See page 37 | |
| Dry Weight..... | 630 lbs (286 kg) | |
| Filled Weight..... | 3,799 lbs (1,723 kg) | |
| Water Capacity (Avg. Fill) | 380 US gallons (1,438 Liters) | |
| Electronic Controls | Solid State Electronic Controls with LED Readout, Programmable Temperature, Filtration, and Heat Cycles | |
| Pump 1 (North American)..... | 2-Speed, 4.2 hp brake, 2.5 hp continuous | |
| Pump 1 (Export)..... | 2-Speed, 3.5 hp brake, 2.0 hp continuous | |
| Pump 2 (North American)..... | 1-Speed, 4.2 hp brake, 2.0 hp continuous | |
| Pump 2 (Export)..... | 2-Speed, 3.5 hp brake, 2.0 hp continuous | |
| Total Jets | 33 | |
| Euro Jets..... | 6 | |
| Micro Jets..... | 20 | |
| Luxury Jets..... | 3 | |
| Pulsator Jets..... | 4 | |
| Air Controls | 2 | |
| Total Foot Jets Therapy | 2 | |
| Water Management System..... | One 50 ft ² Filter Cartridge on Jets Pump 1, Optional CD Ozone Generator Ready (Factory Installed Ozone Injector) | |
| Lighting..... | Underwater with Two Colored Lenses; Optional Underwater Plug-in Multi-Color LED Light | |
| Synthetic Cabinet Colors..... | Harvest Wheat, Autumn Red, or Silverwood | |
| Acrylic Colors | Platinum, Sand, Sahara, Desert Sand, Bluegrass, Cobalt, or Graphite | |
| Headrests | 3 | |
| Electrical Requirements..... | North American 60Hz Models: 240 VAC @ 40A, 50A or 60A Export 50Hz Models: 230 VAC @ 20A, 30A, or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration. | |
| Warranty..... | North American 60Hz Models: 5 Years Shell, 3 Years Shell Surface, 3 Years for Plumbing Component Leaks, 3 Years Equipment & Controls; Export 50Hz Models: 5 Years Shell, 3 Years Shell Surface, 1 Years for Plumbing Component Leaks, 1 Year Equipment & Controls | |
| Audio System (Optional) | N/A | |

Jacuzzi J-230

Massage Selector / Air Control Diagram



Jets A Powered by Jet Pump 1.
Jets B Powered by Jet Pump 2.

Spa Operation Subject to Change without Notice

Seat Depths

A = 28.0" (71.1cm)
B = 26.5" (67.3cm)
C = 26.5" (67.3cm)

D = 26.0" (66.0cm)
E = 33.0" (83.8cm)

Listed Dimensions
Represent Distance
from Top of Acrylic to
Lowest Point in Seat.



Dimensions/Specifications are Subject to Change Without Notice

Complete Dimensions - All 200 Series Models


| Spa Models | DIMENSIONS A-F | | | | | |
|-------------------------|----------------|---------------|---------------------------|-----------------|--------------|------------------------|
| | A | B | C | D | E | F |
| J-210 (Round Spa) | 78" (198.1cm) | | 77.25" (196.2cm) Round | 30.25" (76.8cm) | 36" (91.4cm) | 77.25" (196.2cm) Round |
| J-220 (Rectangular Spa) | 84" (213.4cm) | 76" (193.0cm) | 75.25" (191.1cm) | | | 83.25" (211.5cm) |
| J-230 (Square Spa) | 84" (213.4cm) | 84" (213.4cm) | 83.25" (211.4cm) | | | 83.25" (211.5cm) |
| J-270 | 91" (231.1cm) | 91" (231.1cm) | 90.25" (229.2cm) | 31.25" (79.4cm) | 37" (94.0cm) | 90.25" (229.2cm) |
| J-280 | 91" (231.1cm) | 91" (231.1cm) | 90.25" (229.2cm) | 31.25" (79.4cm) | 37" (94.0cm) | 90.25" (229.2cm) |

- Dimensions Subject to Change Without Notice -




IMPORTANT! Always Measure Each Hot Tub for Exact Dimensions BEFORE Designing its Foundation Support and/or Decking.

Spa Top View (J-230 Illustrated)

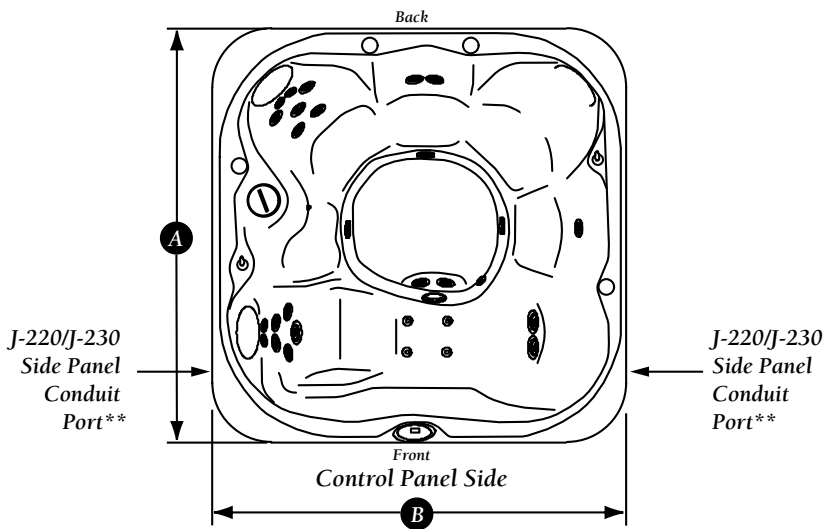

**Single Conduit Port Available on Round J-210 Models at Front Panel Side of Spa.


Control Panel Side View (All Models)

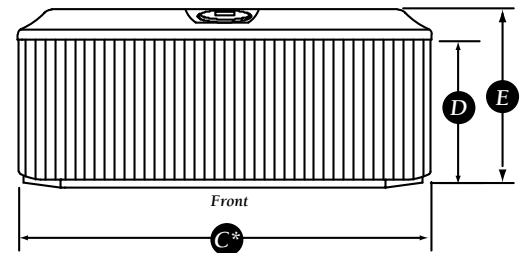


Equipment Access Panel (Spa Drain Hose Located Behind Front Panel)

*Panels C & F: Always Design Surround or Decking to Allow Removal of Entire Side Skirt on All Sides of Spa for Drain / Repair Access.

Spa Bottom View (J-230 Illustrated)

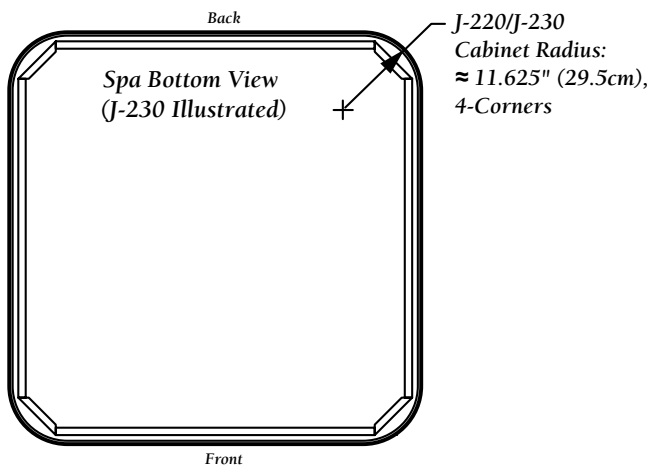

Left / Right Side View (All Models)

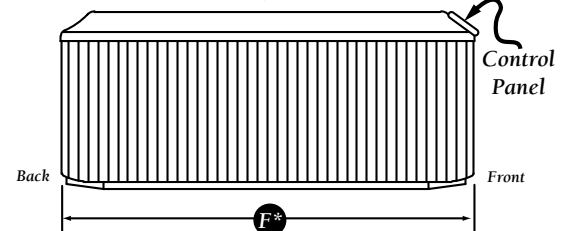

Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.