



Hot Tubs

2009 Dimension and Specification Handbook



Important Safety Instructions-All Models



© 2009 Jacuzzi Hot Tubs. Jacuzzi may make product modifications and enhancements. Therefore, specifications may change without notice. Dimensions are approximate and for reference only.



CAUTION: Always measure each spa for exact dimensions before designing its foundational support and/or decking.



When designing a foundational support, always account for the following load factors:

1. Filled spa weight, plus (+)
2. Combined occupant weight at the maximum seating capacity, plus (+)
3. Weight of the support decking, when applicable.



The technical data given in this publication is for reference only. It implies no warranty of kind.



Dimensions/ specifications subject to change without notice. Spa operation subject to change without notice.

Table of Contents

Jacuzzi J-400 Series Hot Tubs	5
J-480 Specifications	5
J-480 Operations	6
J-470 Specifications	7
J-470 Operations	8
J-465 Specifications	9
J-465 Operations	10
J-460 Specifications	11
J-460 Operations	12
Jacuzzi J-300 Series Hot Tubs	13
J-375 Specifications	13
J-375 Operations	14
J-365 Specifications	15
J-365 Operations	16
J-355 Specifications	17
J-355 Operations	18
J-345 Specifications	19
J-345 Operations	20
J-335 Specifications	21
J-335 Operations	22
J-325 Specifications	23
J-325 Operations	24
J-315 Specifications	25
J-315 Operations	26
Jacuzzi J-200 Series Hot Tubs	27
J-280 Specifications	27
J-280 Operations	28

Table of Contents

***J-270 Specifications* 29**
***J-270 Operations* 30**

***J-230 Specifications* 31**
***J-230 Operations* 32**

***J-210 Specifications* 33**
***J-210 Operations* 34**

***Complete Dimensions-All 400 Series Models*..... 35**
***Complete Dimensions-All 300 Series Models*..... 36**
***Complete Dimensions-All 200 Series Models*..... 37**

Jacuzzi J-480


<p>Seating Capacity.....6 Adults</p> <p>Dimensions94" x 94" x 39" Front/44" Back, (239 cm x 239 cm x 99 cm Front/112 cm Back); For complete dimensions, See page 37</p> <p>Dry Weight.....950 lbs (431 kg)</p> <p>Filled Weight5,707 lbs (2,589 kg)</p> <p>Water Capacity.....570 US gallons (2,158 Liters)</p> <p>Electronic ControlsSolid state, LCD user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of preprogrammed filtration cycles and water temperature setting.</p> <p>Pump 1.....North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame Export (50 Hz):1-Speed, 2.0 HP continuous</p> <p>Pump 2.....North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame Export (50 Hz):1-Speed, 2.0 HP continuous</p> <p>Circulation Pump.....Yes, 24-Hour</p> <p>Total PowerPro Jets48</p> <p>Mini PowerPro (FX).....22</p> <p>PowerPro (FX2S)6</p> <p>PowerPro (IX)1, with independent air control and multi-colored LED light illumination</p> <p>PowerPro (MX2).....3</p> <p>PowerPro (NX2)4</p> <p>PowerPro (PX).....6</p> <p>PowerPro (RX)6</p> <p>Message Selectors2</p> <p>Air Controls.....4</p> <p>Total Foot Jet Therapy5 (includes IX jet)</p> <p>Water Management System.....One 60 ft² filter cartridge on 24-hour circulation pump; one ProCatch bag with ProCatch Polishing filter; optional CD ozone generator ready (Factory installed ozone injector)</p> <p>LED LightingOne IX footwell jet, one "Jacuzzi" seat logo, one Prolite with 4 color modes, two waterfall lights, cupholders and pillows</p> <p>Synthetic Cabinet Colors.....Harvest Wheat, Autumn Red, Silverwood, Roasted Chestnut, Tuscan Stone or Venetian Stone</p> <p>Acrylic ColorsPlatinum, Opal, Silver Pearl, Sand, Sahara, Desert Sand, Cobalt, or Graphite</p> <p>Headrests4</p> <p>WaterfallsTwo with independent flow rate (on or off) adjustment; powered by 24-hour circulation pump</p> <p>Electrical Requirements:North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@20A, 30A, or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</p> <p>Warranty*.....North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years on Cabinet, 2 Years Jets; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year on Cabinet, 1 Year on Jets</p> <p>Audio System (Optional).....J-1000 JBL Audio system with wireless remote control, iPod docking station, Aux 3.5 mm jack for MP3, 1GB hard drive, USB port, and AM/FM/CD radio</p>	 <p>Back</p> <p>Front</p>
--	--

*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-480

Message Selector/Air Control Diagram

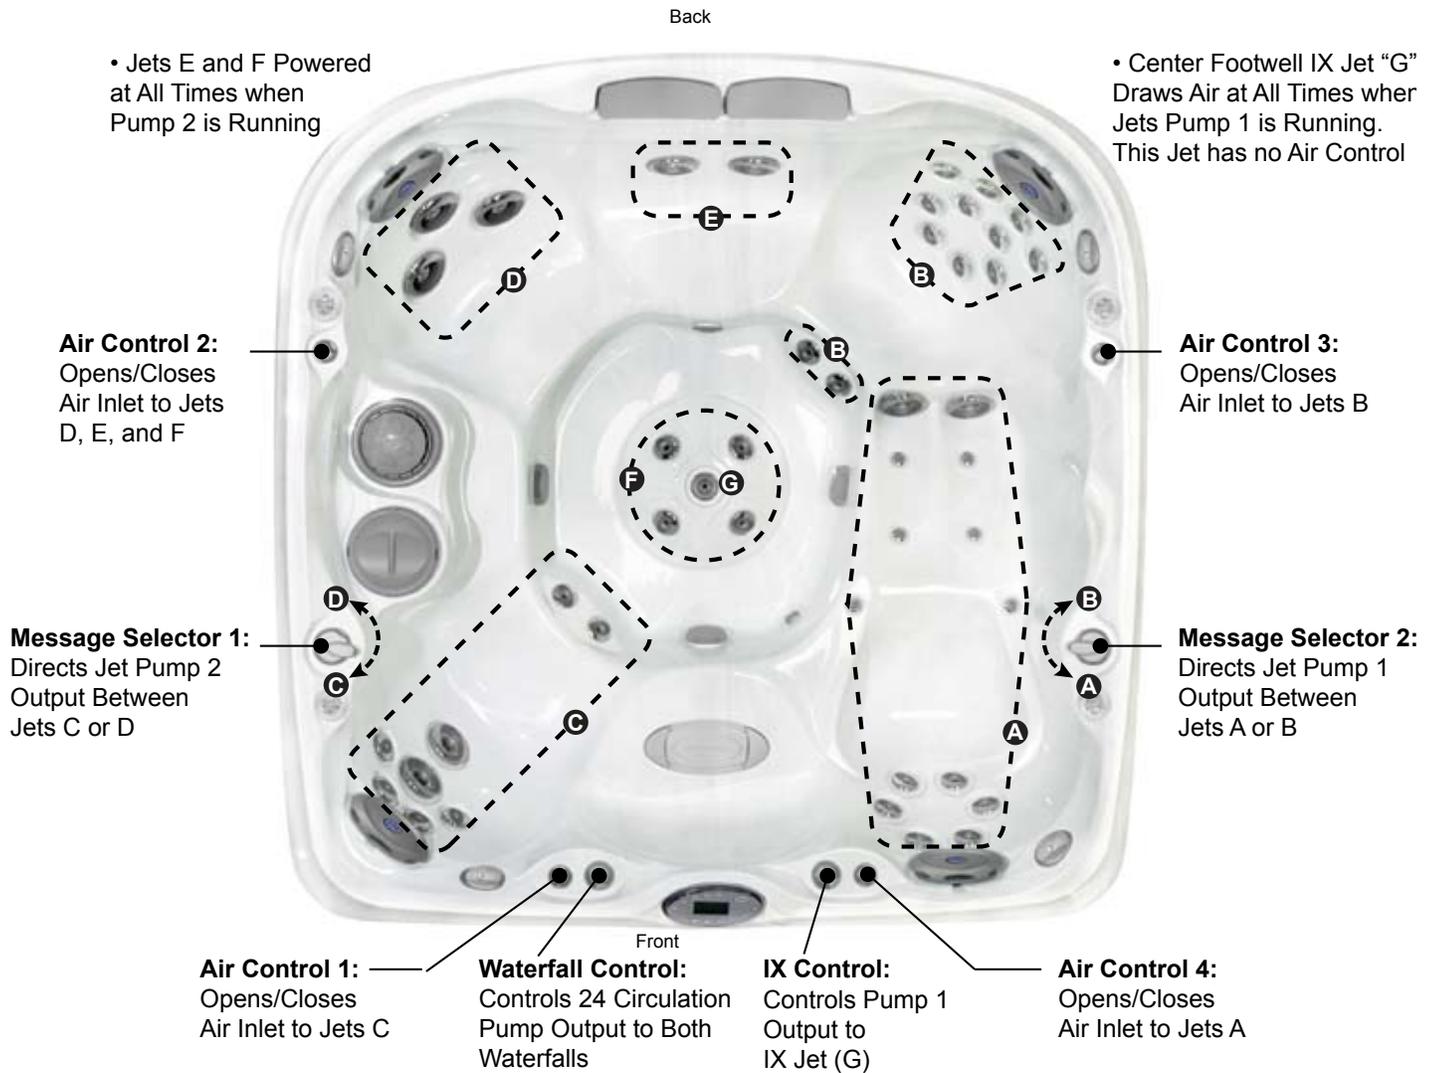


Spa Operation Subject to Change without Notice

Seat Depths

Front-Back
 A = 29.00-31.50"
 B = 26.00-28.00"
 C = 30.00-32.00"
 D = 28.25-30.25"
 E = 26.33-28.33"

Front-Back
 F = 17.75-19.75"
 G = 26.25-28.25"
 H = 32.50-34.50"

Listed dimensions represent distance from top of acrylic to lowest point in seat.



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-470


Seating Capacity	6-7 Adults	
Dimensions	91" x 91" x 39" Front/44" Back, (231 cm x 231 cm x 99 cm Front/112 cm Back); For Complete Dimensions, See page 37	
Dry Weight	920 lbs (417 kg)	
Filled Weight	5,385 lbs (2,443 kg)	
Water Capacity	535 US gallons (2,025 Liters)	
Electronic Controls	Solid state, LCD user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of preprogrammed filtration cycles and water temperature setting.	
Pump 1	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame Export (50 Hz):1-Speed, 2.0 HP continuous	
Pump 2	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame Export (50 Hz):1-Speed, 2.0 HP continuous	
Circulation Pump	Yes, 24-Hour	
Total PowerPro Jets	39	
Mini PowerPro (FX)	20	
PowerPro (FX2S)	5	
PowerPro (IX)	1, with independent air control and multi-colored LED light illumination	
PowerPro (MX2)	3	
PowerPro (NX2)	4	
PowerPro (RX)	6	
Message Selectors	2	
Air Controls	4	
Total Foot Jet Therapy	5 (includes IX jet)	
Water Management System	One 60 ft ² filter cartridge on 24-hour circulation pump; one ProCatch bag with ProCatch Polishing filter; optional CD ozone generator ready (Factory installed ozone injector)	
LED Lighting	One IX footwell jet, one "Jacuzzi" seat logo, one ProLite with 4 color modes, two waterfall lights, cupholders and pillows	
Synthetic Cabinet Colors	Harvest Wheat, Autumn Red, Silverwood, Roasted Chestnut, Tuscan Stone or Venetian Stone	
Acrylic Colors	Platinum, Sand, Sahara, Opal, Desert Sand, Cobalt, Silver Pearl, or Graphite	
Headrests	4	
Waterfalls	Two with independent flow rate (on or off) adjustment; powered by 24-hour circulation pump	
Electrical Requirements:	North America (60 Hz): 240 VAC@30A, 50A, or 60A Export (50 Hz): 230-240 VAC@20A, 30A, or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.	
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years on Cabinet, 2 Years on Jets; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year on Cabinet, 1 Year on Jets	
Audio System (Optional)	J-1000 JBL Audio system with wireless remote control, iPod docking station, Aux 3.5 mm jack for MP3, 1GB hard drive, USB port, and AM/FM/CD radio	

*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-470

Message Selector/Air Control Diagram

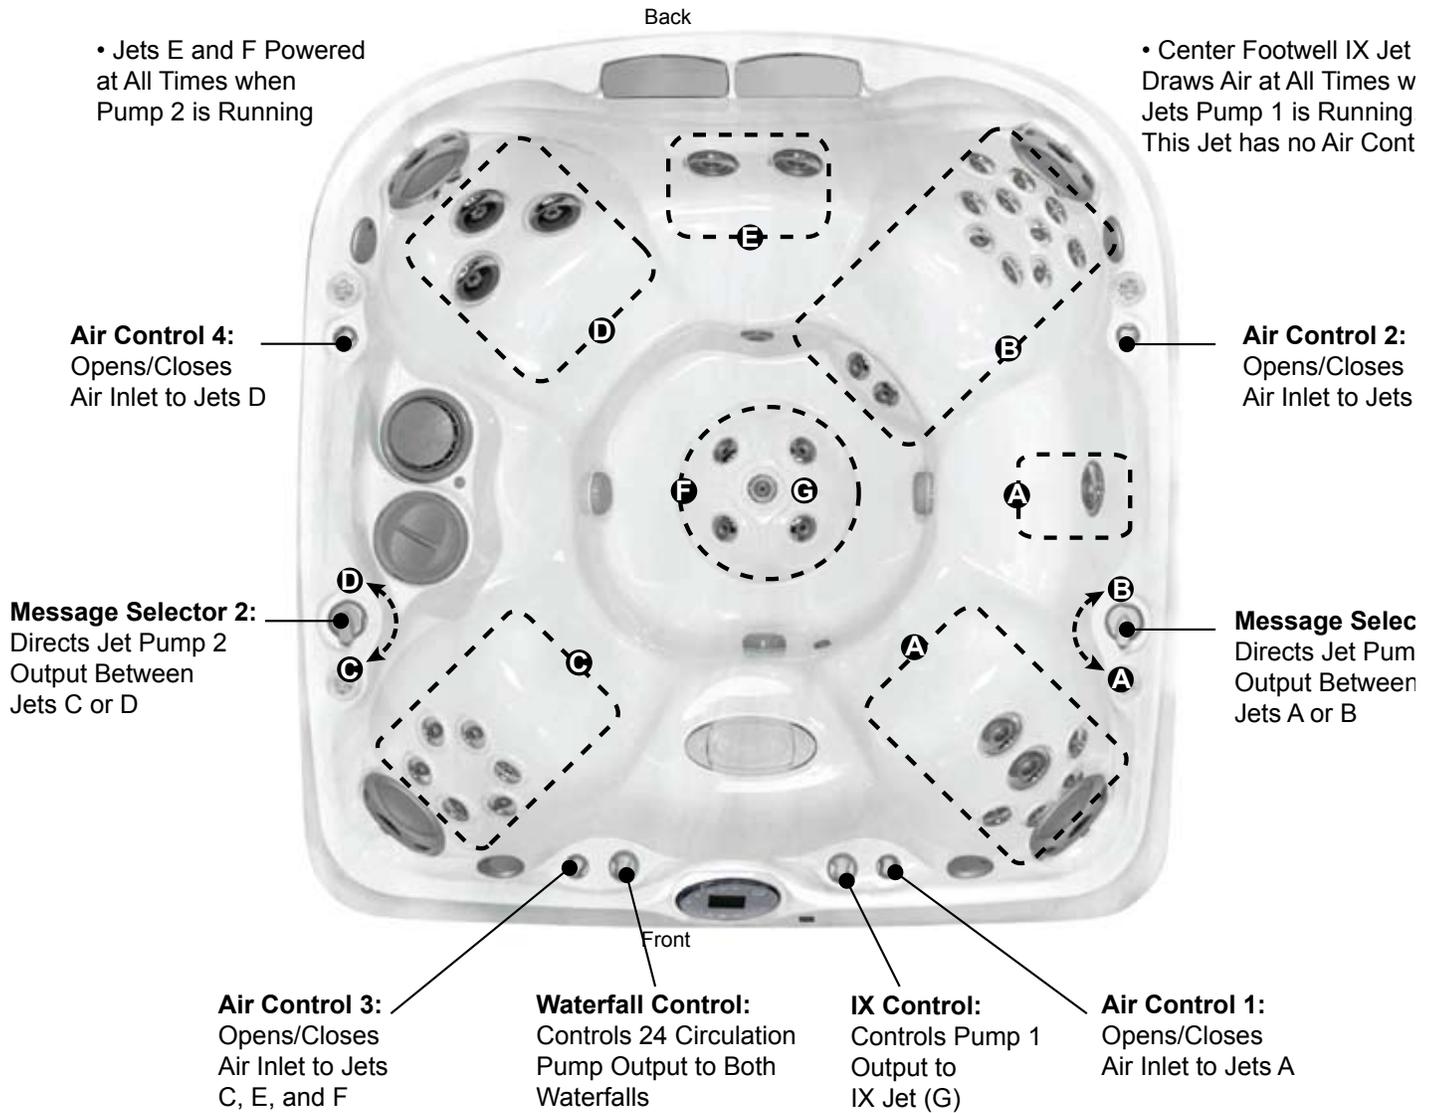


Spa Operation Subject to Change without Notice

Seat Depths

Front-Back
 A = 29.00-31.00"
 B = 26.50-28.50"
 C = 30.50-32.50"
 D = 21.00-23.00"
 E = 27.25-29.25"

Front-Back
 F = 17.00-19.00"
 G = 25.00-27.00"
 H = 32.50-34.50"

Listed dimensions represent distance from top of acrylic to lowest point in seat.



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-465


<p>Seating Capacity.....4-5 Adults</p> <p>Dimensions88" x 88" x 39" Front/43" Back, (223.5 cm x 223.5 cm x 99 cm Front/109 cm Back); For Complete Dimensions, See page 37</p> <p>Dry Weight.....815 lbs (370 kg)</p> <p>Filled Weight4,821 lbs (2,187 kg)</p> <p>Water Capacity.....480 US gallons (1,817 Liters)</p> <p>Electronic ControlsSolid State, LCD user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of preprogrammed filtration cycles and water temperature setting.</p> <p>Pump 1.....North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame Export (50 Hz):1-Speed, 2.0 HP continuous</p> <p>Pump 2.....North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame Export (50 Hz):1-Speed, 2.0 HP continuous</p> <p>Circulation Pump.....Yes, 24-hour</p> <p>Total PowerPro Jets37</p> <p>PowerPro (MX2)5</p> <p>PowerPro (FX2S)7</p> <p>PowerPro (IX)1, with independent air control and multi-colored LED light illumination</p> <p>PowerPro (RX)6</p> <p>PowerPro (FX).....10</p> <p>PowerPro (NX2)4</p> <p>PowerPro (PX).....4</p> <p>Message Selectors1</p> <p>Air Controls.....3</p> <p>Total Foot Jet Therapy3 (includes IX jet)</p> <p>Water Management System.....One 60 ft² filter cartridge on 24-hour circulation pump; one ProCatch bag with ProCatch Polishing filter; optional CD ozone generator ready (Factory installed ozone injector)</p> <p>LED LightingOne IX footwell jet, one Prolite with 4 color modes, one waterfall with lights, cupholders and pillows</p> <p>Synthetic Cabinet Colors.....Harvest Wheat, Autumn Red, Silverwood, or Roasted Chestnut</p> <p>Acrylic ColorsPlatinum, Sand, Sahara, Opal, Desert Sand, Cobalt, Silver Pearl, or Graphite</p> <p>Headrests4</p> <p>WaterfallsOne with Independent flow rate (on or off) adjustment; powered by 24-hour circulation pump</p> <p>Electrical Requirements:North America (60 Hz): 240 VAC@30A, 50A, or 60A Export (50 Hz): 230-240 VAC@20A, 30A, or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</p> <p>Warranty*.....North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years on Cabinet, 2 Years on Jets Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year on Cabinet, 1 Year on Jets</p> <p>Audio System (Optional).....J-1000 JBL Audio system with wireless remote control, iPod docking station, Aux 3.5 mm jack for MP3, 1GB hard drive, USB port, and AM/FM/CD radio</p>	 <p>Back</p> <p>Front</p>
---	--

*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-465

Message Selector/Air Control Diagram

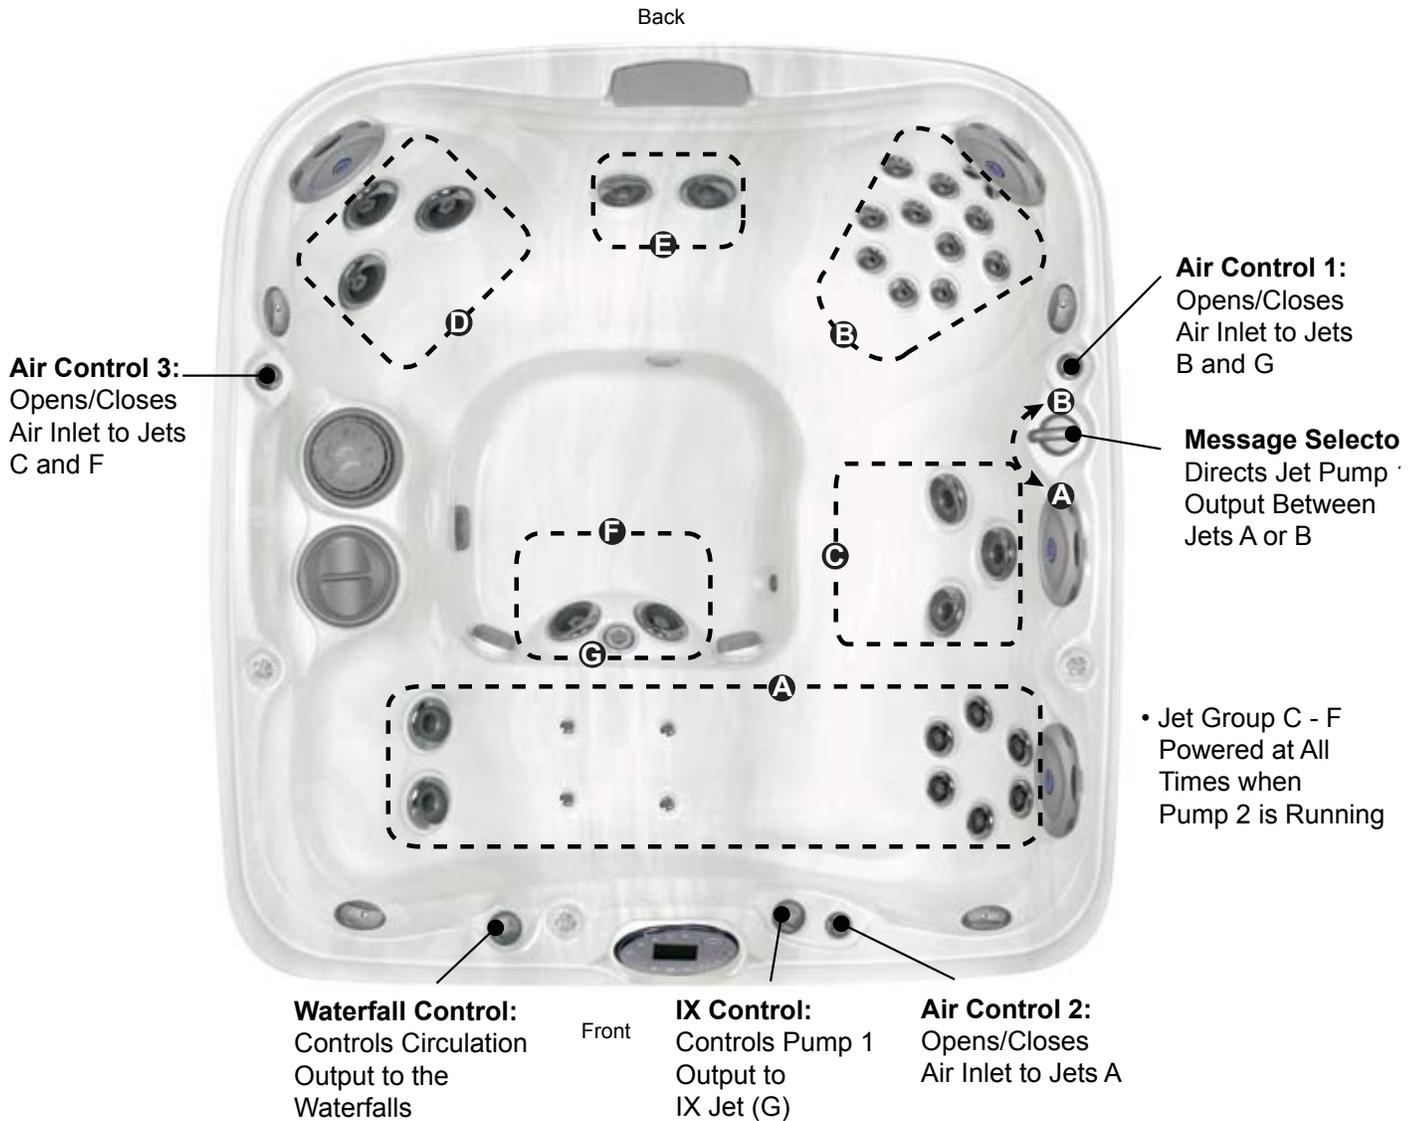


Spa Operation Subject to Change without Notice

Seat Depths

Front-Back
 A = 27.00-29.00"
 B = 26.50-28.50"
 C = 29.00-31.00"
 D = 25.50-27.50"
 E = 25.00-27.00"

Front-Back
 F = 19.00-21.00"
 G = 22.00-24.00"
 H = 32.50-34.50"

Listed dimensions
 represent distance
 from top of acrylic to
 lowest point in seat.



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-460


Seating Capacity	5 Adults	
Dimensions	89" x 77" x 34" (226 cm x 196 cm x 86.5 cm); For Complete Dimensions, See page 37	
Dry Weight	750 lbs (340 kg)	
Filled Weight	4,163 lbs (1,889 kg)	
Water Capacity	409 US gallons (1,548 Liters)	
Electronic Controls	Solid state, LCD user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of preprogrammed filtration cycles and water temperature setting.	
Pump 1	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame Export (50 Hz):1-Speed, 2.0 HP continuous	
Pump 2	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame Export (50 Hz):1-Speed, 2.0 HP continuous	
Circulation Pump	Yes, 24-Hour	
Total PowerPro Jets	33	
PowerPro (MX2)	5	
PowerPro (FX2S)	5	
PowerPro (IX)	1, with independent air control and multi-colored LED light illumination	
PowerPro (RX)	4	
PowerPro (FX)	14	
PowerPro (PX)	4	
Message Selectors	1	
Air Controls	4	
Total Foot Jet Therapy	3 (includes IX jet)	
Water Management System	One 45 ft ² filter cartridge on 24-hour circulation pump; one ProCatch bag with ProCatch Polishing filter; optional CD ozone generator ready (Factory installed ozone injector)	
LED Lighting	One IX footwell jet, one ProLite with 4 color modes, one waterfall with lights, cupholders and pillows	
Synthetic Cabinet Colors	Harvest Wheat, Autumn Red, Silverwood, or Roasted Chestnut	
Acrylic Colors	Platinum, Sand, Sahara, Opal, Desert Sand, Cobalt, Silver Pearl, or Graphite	
Headrests	4	
Waterfalls	One independent flow rate (on or off) adjustment; powered by 24-hour circulation pump	
Electrical Requirements:	North America (60 Hz): 240 VAC@30A, 50A, or 60A Export (50 Hz): 230-240 VAC@20A, 30A, or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.	
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years on Cabinet, 2 Years on Jets; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year on Cabinet, 1 Year on Jets	
Audio System (Optional)	J-1000 JBL Audio system with wireless remote control, iPod docking station, Aux 3.5 mm jack for MP3, 1GB hard drive, USB port, and AM/FM/CD radio	

*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-460

Message Selector/Air Control Diagram

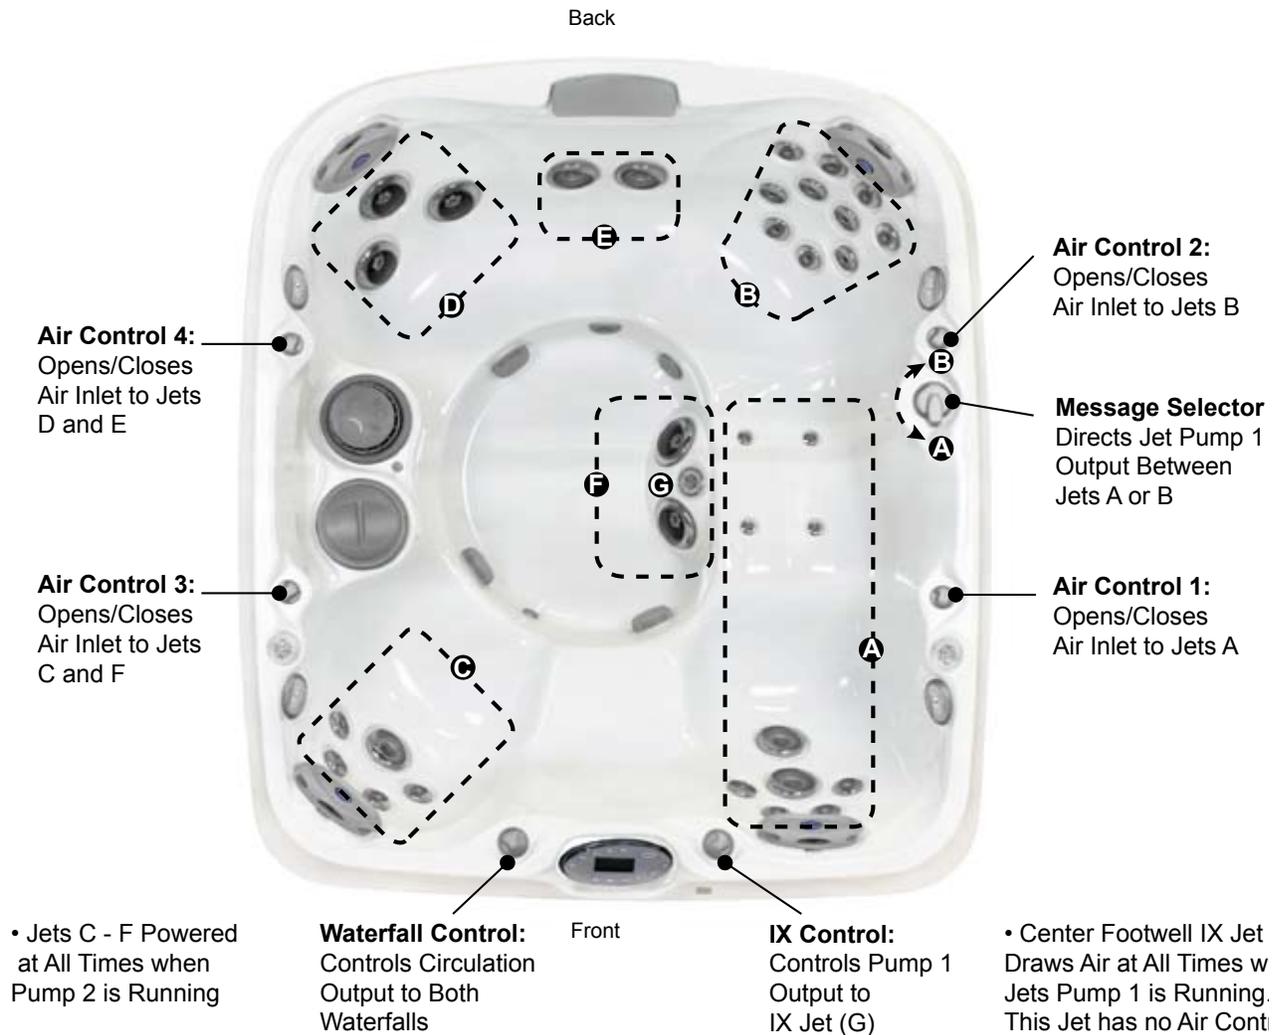


Spa Operation Subject to Change without Notice

Seat Depths


A = 25.50" (64.7 cm)
B = 24.75" (62.9 cm)
C = 26.00" (66.0 cm)
D = 23.12" (59.7 cm)
E = 26.50" (67.3 cm)

F = 18.00" (45.7 cm)
G = 23.50" (59.7 cm)
H = 31.25" (79.4 cm)

Listed dimensions
represent distance
from top of acrylic to
lowest point in seat.



Dimensions/Specifications are Subject to Change Without Notice

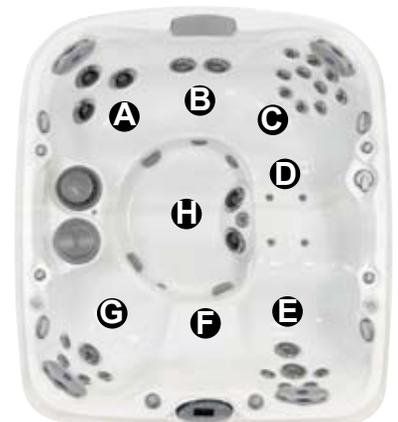

Jacuzzi J-375

Seating Capacity	6	
Dimensions	91" x 91" x 38" (231 cm x 231 cm x 96.5 cm);	
	For complete dimensions, see page 38	
Dry Weight	960 lbs (435 kg)	
Filled Weight	5,383 lbs (2,442 kg)	
Water Capacity	530 US gallons (2,006 Liters)	
Electronic Controls	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles	
Pump 1	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 48 Frame	
	Export (50 Hz): 2-Speed, 2.0 HP continuous, 48 Frame	
Pump 2	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 48 Frame	
	Export (50 Hz): 1-Speed, 2.0 HP continuous, 48 Frame	
Circulation Pump	24-hour, programmable for daily start time and duration	
Total PowerPro Jets	46	
PowerPro (BX)	12, Optional stainless steel escutcheons (Factory installed)	
PowerPro (FX)	21, Optional stainless steel escutcheons (Factory installed)	
PowerPro (FX2S)	4, Optional stainless steel escutcheons (Factory installed)	
Maxx PowerPro (MX)	5, Optional stainless steel escutcheons (Factory installed)	
PowerPro (NX2)	4, Optional stainless steel escutcheons (Factory installed)	
Diverter Valves	2	
Air Controls	4, On/Off rocker switch air controller	
Total Foot Jets	6	
Water Management System	Two 60 ft ² Filter cartridges; filter 1 on 24-hour circulation pump; filter 2 on jets pump 1; optional CD ozone generator ready (Factory installed ozone injector)	
LED Lighting	One underwater prolite with 4 color modes, one colored waterfall lights, cup holders, and backlit pillow insert with logo	
Cabinet	Harvest Wheat, Autumn Red, Roasted Chestnut or Silverwood	
Acrylic Colors	Platinum, Sand, Silver Pearl, Sahara, Opal, Desert, Cobalt, Graphite	
Headrests	4	
Waterfalls	One independent flow rate (on or off) adjustment; powered by pump 1	
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A	
	Export (50 Hz): 230-240 VAC@20A, 30A, or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.	
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets;	
	Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year on Cabinet, 1 Year Jets	
Audio System (Optional)	AM/FM/CD stereo receiver (MP3 player compatible) with four speakers, subwoofer, auxiliary audio jack for iPod and MP3 players, and standard wireless remote	



Back

Front


*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-375

Message Selector/Air Control Diagram

Spa Operation Subject to
Change without Notice

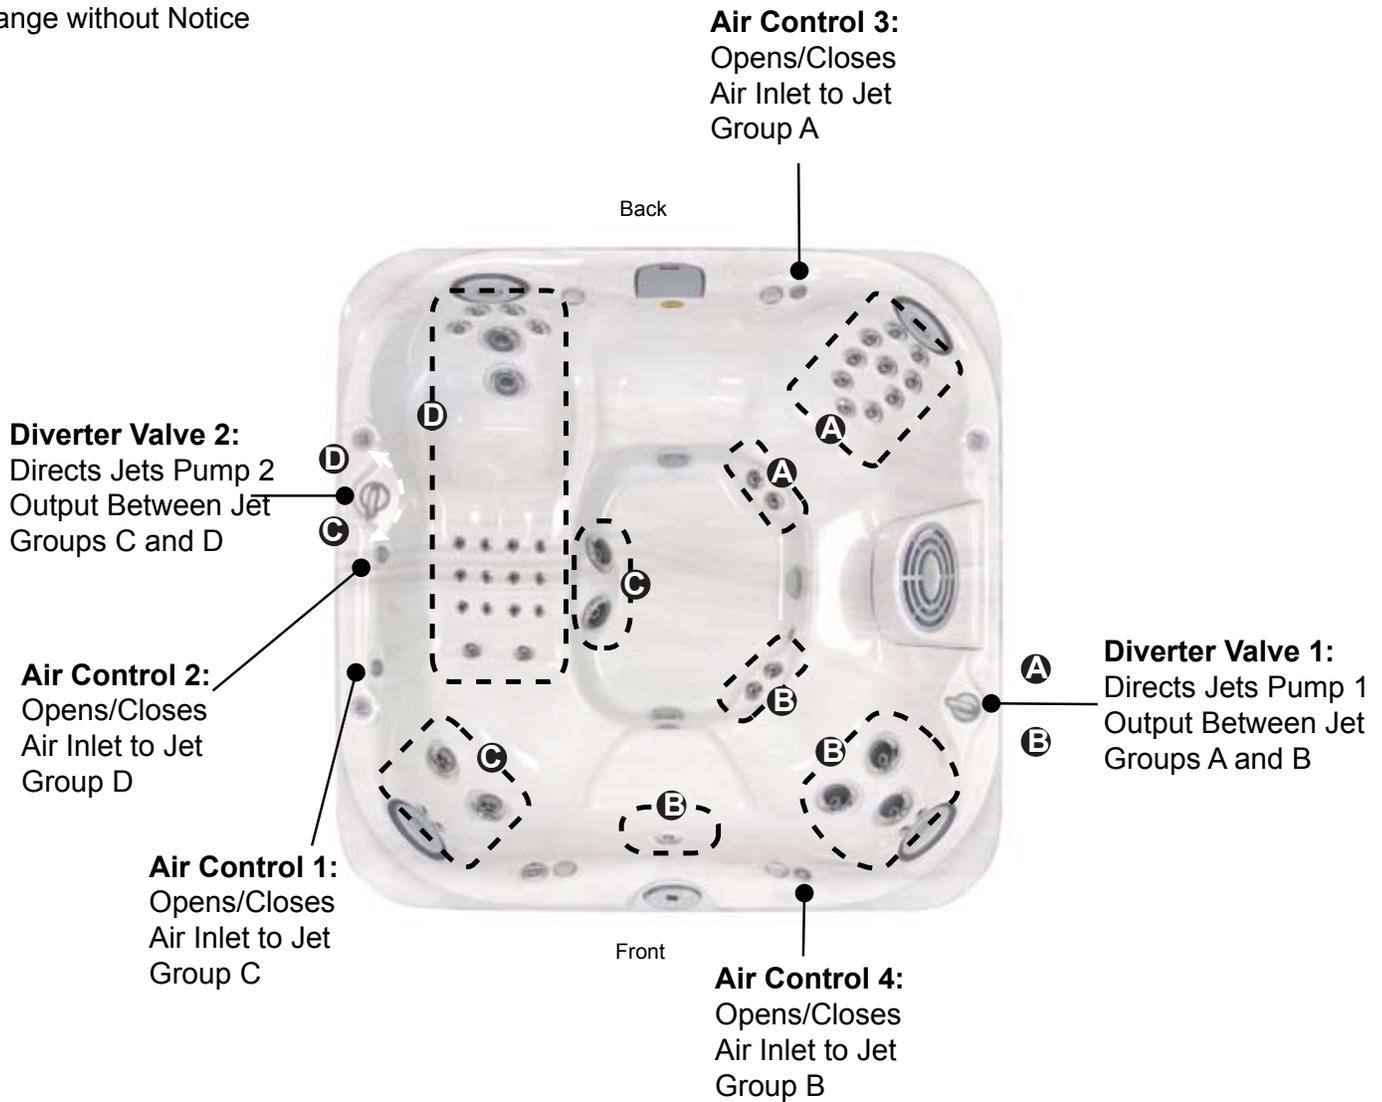

Waterfall is always on when Pump 1 is activated, but
Spa Operation Subject to Change without Notice

Seat Depths

A = 26.00" (66.0 cm)
B = 26.00" (66.0 cm)
C = 23.75" (60.3 cm)
D = 27.75" (70.5 cm)
E = 26.00" (66.0 cm)

F = 19.50" (49.5 cm)
G = 33.00" (83.8 cm)

Listed dimensions
represent distance
from top of acrylic to
lowest point in seat.



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-365

Seating Capacity	6-7 Adults	
Dimensions	91" x 84" x 38" (231 cm x 213.5 cm x 96.5 cm); For Complete Dimensions, See page 38	
Dry Weight	887 lbs (403 kg)	
Filled Weight	5,060 lbs (2,295 kg)	
Water Capacity	500 US gallons (1,893 Liters)	
Electronic Controls	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles	
Pump 1	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 48 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous	
Pump 2	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 48 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous	
Circulation Pump	Yes, 24-Hour, programmable for daily start time and duration	
Total PowerPro Jets	32	
PowerPro (FX)	23, Optional stainless steel escutcheons (Factory installed)	
PowerPro (FX2S)	6, Optional stainless steel escutcheons (Factory installed)	
PowerPro (MX)	3, Optional stainless steel escutcheons (Factory installed)	
Message Selectors	2	
Air Controls	5, On/Off rocker style	
Total Foot Jets Therapy	4	
Water Management System	Two 60 ft ² filter cartridges; filter 1 on 24-hour circulation pump; filter 2 on jets pump 1; optional CD ozone generator ready (Factory installed ozone injector)	
LED Lighting	One underwater ProLite with 4 color modes, one colored waterfall lights, cup holders, and backlit pillow insert with logo	
Synthetic Cabinet Colors	Harvest Wheat, Autumn Red, Silverwood, or Roasted Chestnut	
Acrylic Colors	Platinum, Sand, Sahara, Opal, Silver Pearl, Desert Sand, Cobalt, or Graphite	
Headrests	4	
Waterfalls	One independent flow rate (on or off) adjustment; powered by pump 1	
Electrical Requirements	North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@20A, 30A, or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.	
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years on Cabinet, 2 Years on Jets; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year on Cabinet, 1 Year on Jets	
Audio System (Optional)	AM/FM/CD stereo receiver (MP3 player compatible) with four speakers, subwoofer, auxiliary audio jack for iPod and MP3 players, and standard wireless remote	


*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-365

Message Selector/Air Control Diagram

Spa Operation Subject to
Change without Notice

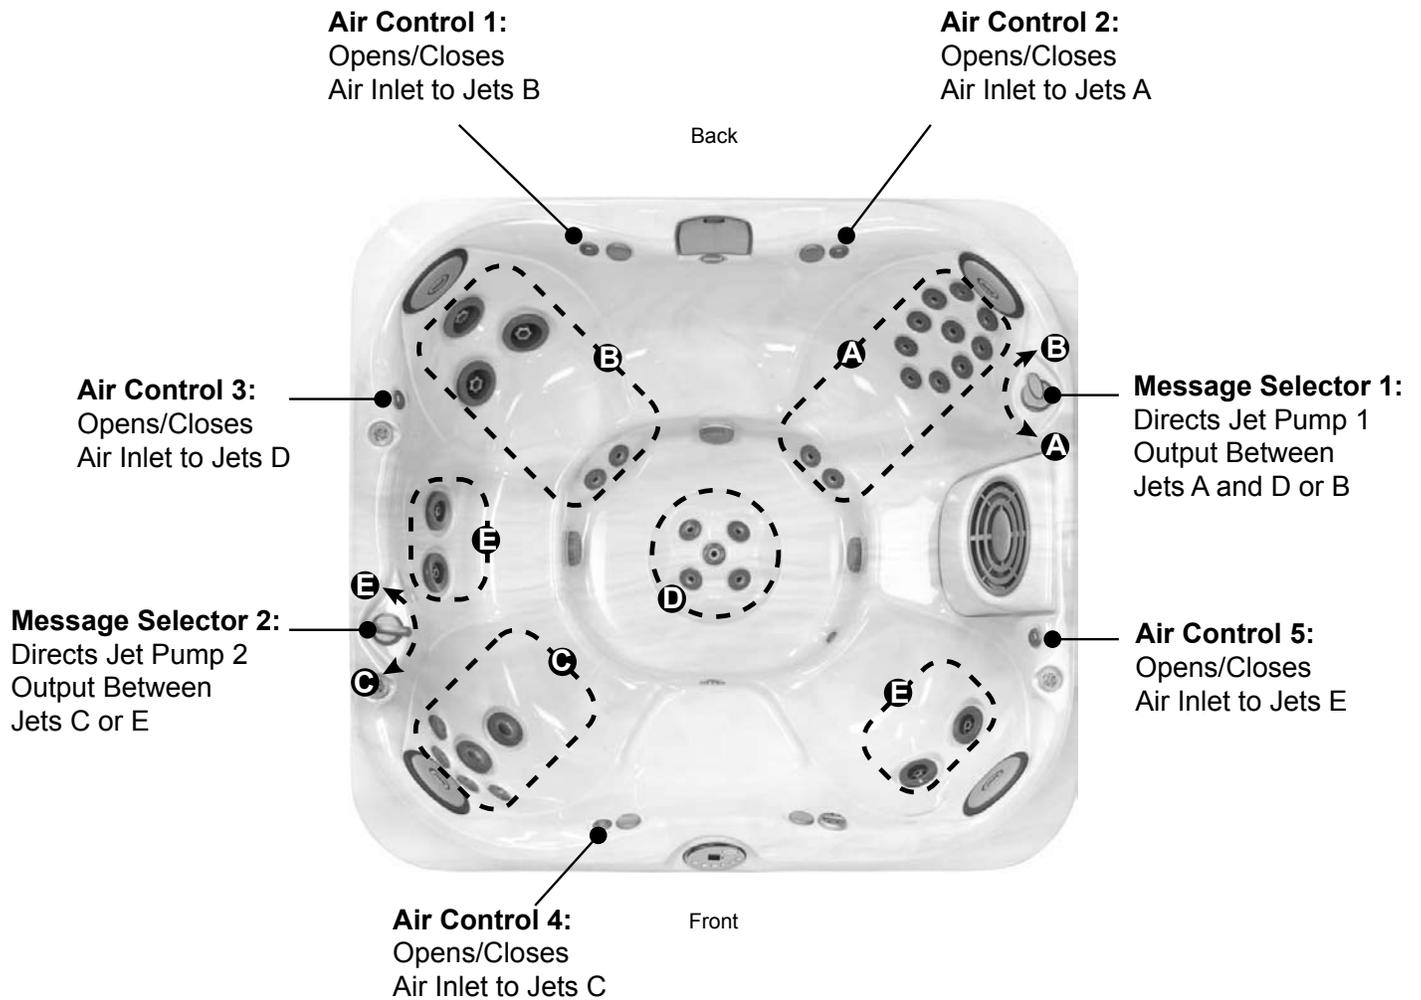

Spa Operation Subject to Change without Notice

Seat Depths

A = 25.00" (63.5 cm)
B = 23.00" (58.4 cm)
C = 27.50" (69.9 cm)
D = 22.50" (57.2 cm)
E = 27.00" (68.6 cm)

F = 19.25" (48.9 cm)
G = 26.25" (66.7 cm)
H = 25.50" (64.8 cm)
I = 33.25" (84.5 cm)

Listed dimensions
represent distance
from top of acrylic to
lowest point in seat.



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-355

Seating Capacity	5-6 Adults	
Dimensions	91" x 84" x 38" (231 cm x 213.5 cm x 96.5 cm); For Complete Dimensions, See page 38	
Dry Weight	882 lbs (400 kg)	
Filled Weight	4,929 lbs (2,236 kg)	
Water Capacity	485 US gallons (1,836 Liters)	
Electronic Controls	Solid state electronic controls with LED read-out, programmable temperature, filtration, and heat cycles	
Pump 1	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 48 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous	
Pump 2	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 48 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous	
Circulation Pump	Yes, 24-hour, programmable for daily start time and duration	
Total PowerPro Jets	40	
PowerPro (BX)	12, Optional stainless steel escutcheons (Factory installed)	
PowerPro (FX)	19, Optional stainless steel escutcheons (Factory installed)	
PowerPro (FX2S)	4, Optional stainless steel escutcheons (Factory installed)	
PowerPro (MX)	5, Optional stainless steel escutcheons (Factory installed)	
Message Selectors	2	
Air Controls	4, On/Off rocker style	
Total Foot Jets Therapy	2	
Water Management System	Two 60 ft ² filter cartridges; filter 1 on 24-hour circulation pump; filter 2 on jets pump 1; optional CD ozone generator ready (Factory installed ozone injector)	
LED Lighting	One underwater ProLite with 4 color modes, one colored waterfall lights, cup holders, and backlit pillow insert with logo	
Synthetic Cabinet Colors	Harvest Wheat, Autumn Red, Silverwood, or Roasted Chestnut	
Acrylic Colors	Platinum, Sand, Sahara, Opal, Silver Pearl, Desert Sand, Cobalt, or Graphite	
Headrests	3	
Waterfalls	One independent flow rate (on or off) adjustment; powered by pump 1	
Electrical Requirements	North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@20A, 30A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.	
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years on Cabinet, 2 Years on Jets; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year on Cabinet, 1 Year on Jets	
Audio System (Optional)	AM/FM/CD Stereo receiver (MP3 player compatible) with four speakers, subwoofer, auxiliary audio jack for iPod and MP3 players and standard wireless remote	

*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-355

Message Selector/Air Control Diagram

Spa Operation Subject to
Change without Notice

Air Control 1:
Opens/Closes
Air Inlet to Jets D


Air Control 2:
Opens/Closes
Air Inlet to Jets B

Message Selector 2:
Directs Jet Pump 2
Output Between
Jets C or D

Air Control 4:
Opens/Closes
Air Inlet to Jets C

Air Control 3:
Opens/Closes
Air Inlet to Jets A

Message Selector 1:
Directs Jet Pump 1
Output Between
Jets A or B

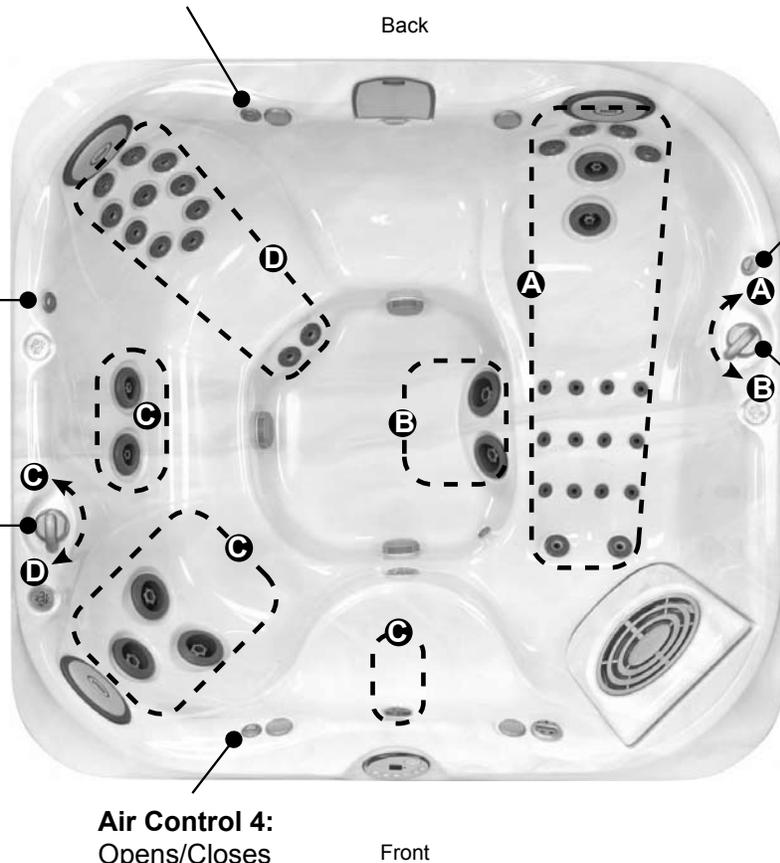

Seat Depths

A = 29.00" (73.6 cm)

B = 21.75" (55.2 cm)

C = 27.00" (68.6 cm)

D = 22.75" (57.8 cm)

E = 13.75" (34.9 cm)

F = 27.50" (69.9 cm)

G = 26.50" (67.3 cm)

H = 33.25" (84.5 cm)

Listed dimensions
represent distance
from top of acrylic to
lowest point in seat.



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-345

Seating Capacity	5-6 Adults	
Dimensions	84" x 84" x 36" (213.5 cm x 213.5 cm x 91.5 cm); For Complete Dimensions, See page 38	
Dry Weight	822 lbs (373 kg)	
Filled Weight	4,644 lbs (2,107 kg)	
Water Capacity	458 US gallons (1,734 Liters)	
Electronic Controls	Solid state electronic controls with LED read-out, programmable temperature, filtration, and heat cycles	
Pump 1	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 48 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous	
Pump 2	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 48 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous	
Circulation Pump	Yes, 24-hour, programmable for daily start time and duration	
Total PowerPro Jets	27	
PowerPro (FX)	18, Optional stainless steel escutcheons (Factory installed)	
PowerPro (FX2S)	4, Optional stainless steel escutcheons (Factory installed)	
PowerPro (MX)	5, Optional stainless steel escutcheons (Factory installed)	
Message Selectors	2	
Air Controls	4, On/Off rocker style	
Total Foot Jets Therapy	2	
Water Management System	Two 60 ft ² filter cartridges; filter 1 on 24-hour circulation pump; filter 2 on jets pump 1; optional CD ozone generator ready (Factory installed ozone injector)	
LED Lighting	One underwater ProLite with 4 color modes, one colored waterfall lights, cup holders, and backlit pillow insert with logo	
Synthetic Cabinet Colors	Harvest Wheat, Autumn Red, Silverwood, or Roasted Chestnut	
Acrylic Colors	Platinum, Sand, Sahara, Opal, Silver Pearl, Desert Sand, Cobalt, or Graphite	
Headrests	4	
Waterfall	One independent flow rate (on or off) adjustment; powered by pump 1	
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@20A, 30A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.	
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years on Cabinet, 2 Years on Jets; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year on Cabinet, 1 Year on Jets	
Audio System (Optional)	AM/FM/CD stereo receiver (MP3 player compatible) with four speakers, subwoofer, auxiliary audio jack for iPod and MP3 players, and standard wireless remote	


*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-345

Message Selector/Air Control Diagram

Spa Operation Subject to
Change without Notice

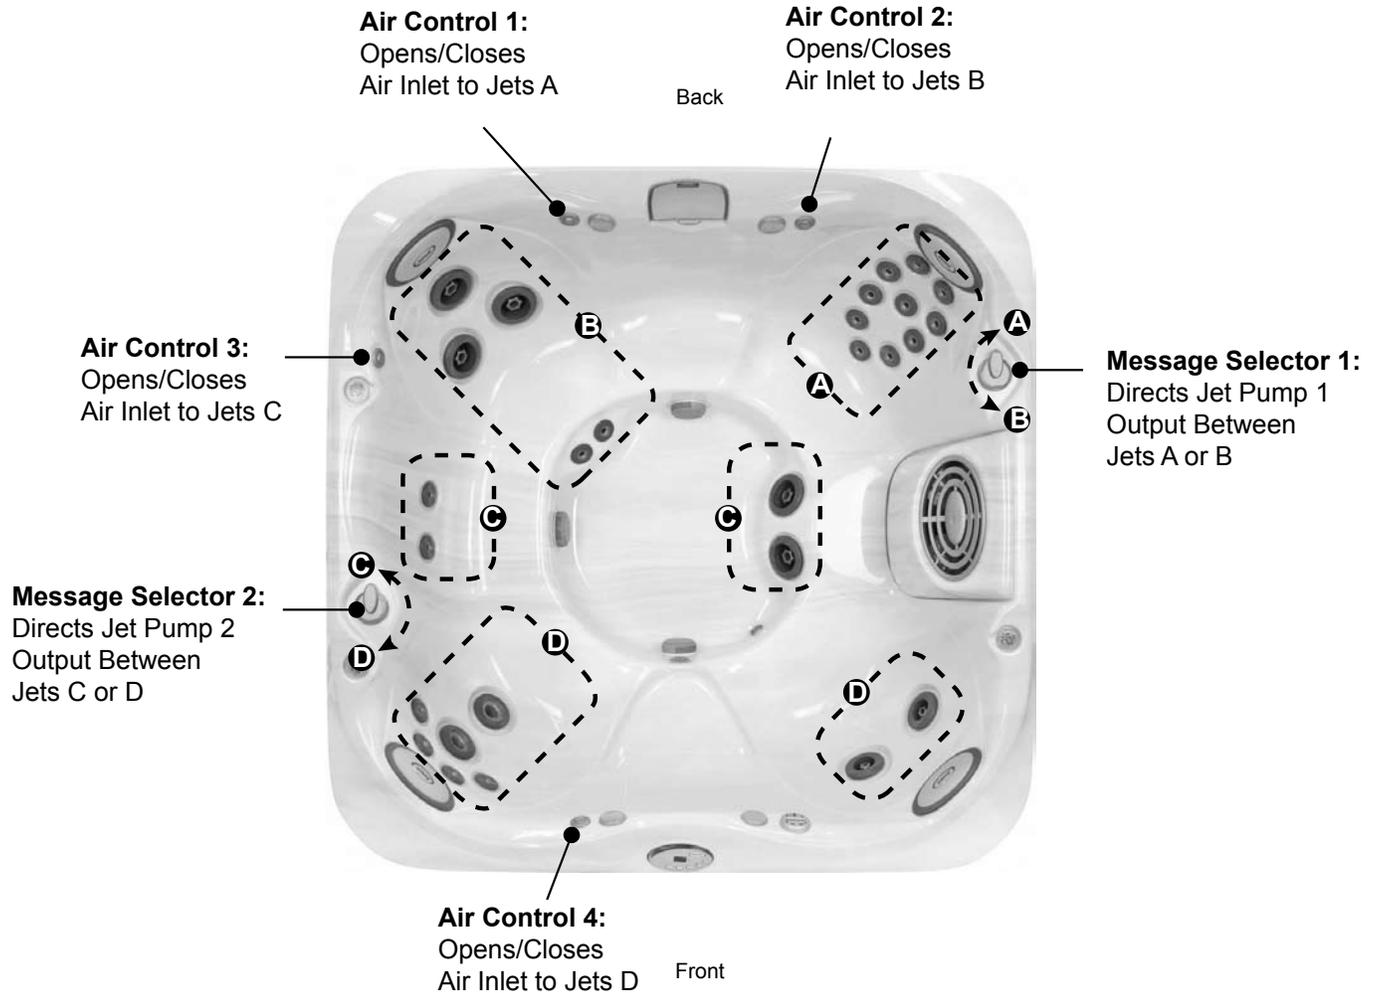

Spa Operation Subject to Change without Notice

Seat Depths

A = 25.50" (64.8 cm)
B = 24.00" (60.1 cm)
C = 28.50" (72.4 cm)
D = 23.00" (58.4 cm)
E = 27.50" (69.9 cm)

F = 19.75" (50.2 cm)
G = 27.00" (58.6 cm)
H = 25.75" (65.4 cm)
I = 34.00" (86.4 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat.



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-335

Seating Capacity	4-5 Adults	
Dimensions	84" x 84" x 36" (213.5 cm x 213.5 cm x 91.5 cm); For Complete Dimensions, See page 38	
Dry Weight	812 lbs (368 kg)	
Filled Weight	4,592 lbs (2,083 kg)	
Water Capacity	453 US gallons (1,715 Liters)	
Electronic Controls	Solid state electronic controls with LED read-out, programmable temperature, filtration, and heat cycles	
Pump 1	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 48 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous	
Pump 2	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 48 Frame Export (50 Hz): 1-Speed, 2.0 HP continuous	
Circulation Pump	Yes, 24-hour, programmable for daily start time and duration	
Total PowerPro Jets	36	
PowerPro (BX)	12, Optional stainless steel escutcheons (Factory installed)	
PowerPro (FX)	18, Optional stainless steel escutcheons (Factory installed)	
PowerPro (FX2S)	4, Optional stainless steel escutcheons (Factory installed)	
PowerPro (MX)	2, Optional stainless steel escutcheons (Factory installed)	
Message Selectors	1	
Air Controls	3, On/Off rocker style	
Water Management System	Two 60 ft ² filter cartridges; filter 1 on 24-hour circulation pump; filter 2 on jets pump 1; optional CD ozone generator ready (Factory installed ozone injector)	
LED Lighting	One underwater ProLite with 4 color modes, one colored waterfall lights, cup holders, and backlit pillow insert with logo	
Synthetic Cabinet Colors	Harvest Wheat, Autumn Red, Silverwood, or Roasted Chestnut	
Acrylic Colors	Platinum, Sand, Sahara, Opal, Silver Pearl, Desert Sand, Cobalt, or Graphite	
Headrests	4	
Waterfall	One independent flow rate (on or off) adjustment; powered by pump 1	
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): 230-240 VAC@20A, 30A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.	
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years on Cabinet, 2 Years on Jets; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year on Cabinet, 1 Year on Jets	
Audio System (Optional)	AM/FM/CD stereo receiver (MP3 player compatible) with four speakers, subwoofer, auxiliary audio jack for iPod and MP3 players, and standard wireless remote	


*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-335

Message Selector/Air Control Diagram

Spa Operation Subject to
Change without Notice

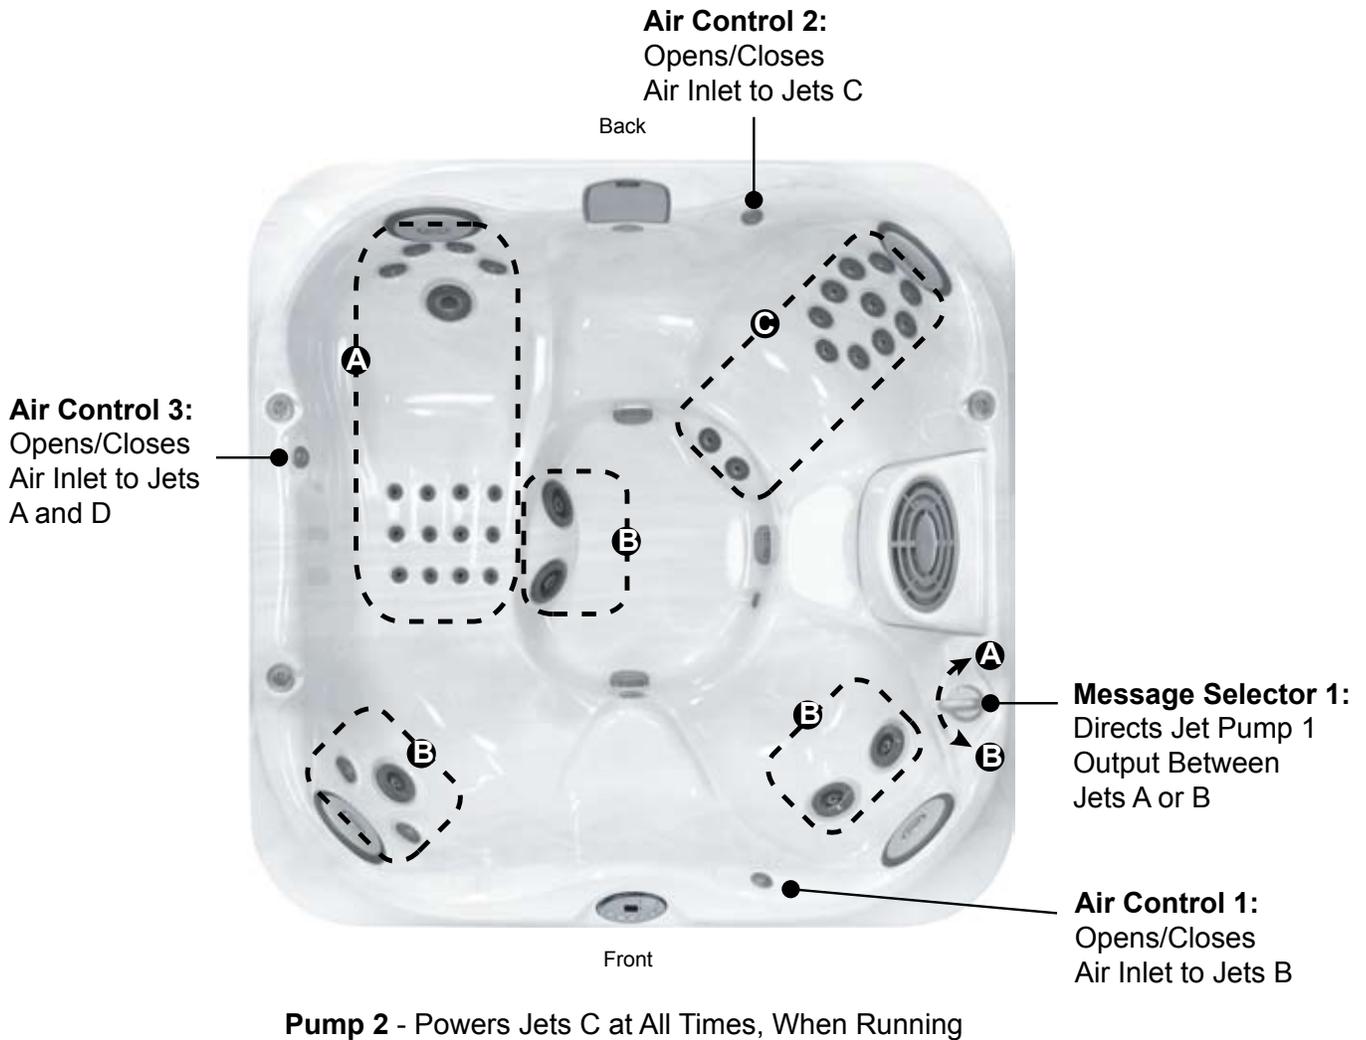

Spa Operation Subject to Change without Notice

Seat Depths

A = 27.00" (68.6 cm)
B = 23.50" (59.7 cm)
C = 28.00" (71.1 cm)
D = 23.00" (58.4 cm)
E = 27.00" (68.6 cm)

F = 19.50" (49.5 cm)
G = 26.50" (67.3 cm)
H = 33.50" (85.1 cm)

Listed dimensions
represent distance
from top of acrylic
to lowest point in
seat.



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-325

Seating Capacity	4-5 Adults	
Dimensions	76" x 84" x 34" (193 cm x 213.5 cm x 86.5 cm); For Complete Dimensions, See page 38	
Dry Weight	595 lbs (270 kg)	
Filled Weight	4,183 lbs (1,897 kg)	
Water Capacity	430 US gallons (1,628 Liters)	
Electronic Controls	Solid state electronic controls with LED read-out, programmable temperature, filtration, and heat cycles	
Pump 1	North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame	
Export (50 Hz):	2-Speed, 2.0 HP continuous	
Circulation Pump	Yes, 24-hour, programmable for daily start time and duration	
Total PowerPro Jets	15	
PowerPro (FX)	4, Optional stainless steel escutcheons (Factory installed)	
PowerPro (FX2S)	11, Optional stainless steel escutcheons (Factory installed)	
Message Selectors	1	
Air Controls	3, On/Off rocker style	
Total Foot Jets Therapy	2	
Water Management System	Two 60 ft ² filter cartridges; filter 1 on 24-hour circulation pump; filter 2 on jets pump 1; optional CD ozone generator ready (Factory installed ozone injector)	
LED Lighting	One underwater ProLite with 4 color modes, one colored waterfall lights	
Synthetic Cabinet Colors	Harvest Wheat, Autumn Red, Silverwood, or Roasted Chestnut	
Acrylic Colors	Platinum, Sand, Sahara, Opal, Silver Pearl, Desert Sand, Cobalt, or Graphite	
Headrests	4	
Waterfall	One independent flow rate (on or off) adjustment; powered by pump 1	
Electrical Requirements:	North America (60 Hz): 120 VAC@15A or 240 VAC@30A, 40A, Export (50 Hz): 230-240 VAC@20A or 30A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.	
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years on Cabinet, 2 Years on Jets; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year on Cabinet, 1 Year on Jets	
Audio System (Optional)	N/A	


*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-325

Message Selector/Air Control Diagram

Spa Operation Subject to
Change without Notice

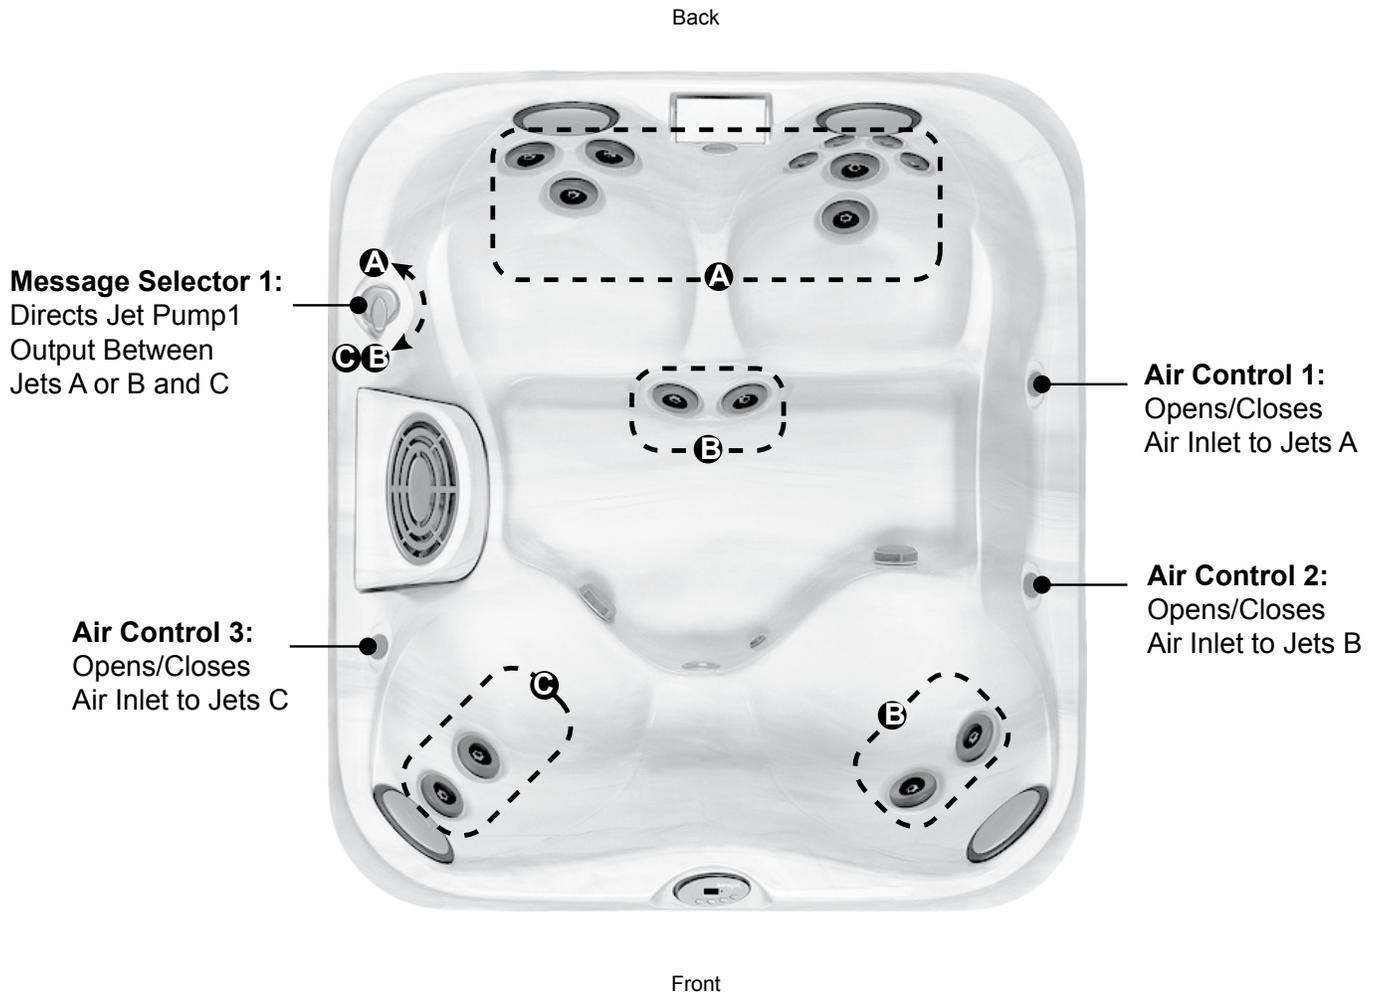

Spa Operation Subject to Change without Notice

Seat Depths

A = 27.00" (68.6 cm)
B = 27.25" (69.2 cm)
C = 28.75" (73.0 cm)

D = 21.50" (54.6 cm)
E = 28.00" (71.1 cm)
F = 31.25" (79.4 cm)

Listed dimensions
represent distance
from top of acrylic to
lowest point in seat.



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-315


Seating Capacity	2-3 Adults	
Dimensions	76" x 66" x 32" (193 cm x 168 cm x 81 cm); For Complete Dimensions, See page 38	
Dry Weight	500 lbs (227 kg)	
Filled Weight	2,787 lbs (1,264 kg)	
Water Capacity	274 US gallons (1,037 Liters)	
Electronic Controls	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles	
Pump 1	North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous	
Circulation Pump	Yes, 24-hour, programmable for daily start time and duration	
Total PowerPro Jets	13	
PowerPro (FX)	6, Optional stainless steel escutcheons (Factory installed)	
PowerPro (FX2S)	7, Optional stainless steel escutcheons (Factory installed)	
Message Selectors	1	
Air Controls	2, On/Off rocker style	
Total Foot Jets Therapy	2	
Water Management System	Two 60 ft ² filter cartridges; filter 1 on 24-hour circulation pump; filter 2 on jets pump 1; optional CD ozone generator ready (Factory installed ozone injector)	
LED Lighting	One underwater ProLite with 4 color modes, and one colored waterfall lights	
Synthetic Cabinet Colors	Harvest Wheat, Autumn Red, Silverwood, or Roasted Chestnut	
Acrylic Colors	Platinum, Sand, Sahara, Opal, Silver Pearl, Desert Sand, Cobalt, or Graphite	
Headrests	3	
Waterfall	One independent flow rate (on or off) adjustment; powered by pump 1	
Electrical Requirements:	North America (60 Hz): 120 VAC@15A or 240 VAC@30A, 40A Export (50 Hz): 230-240 VAC@20A, or 30A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.	
Warranty*	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years on Cabinet, 2 Years on Jets; Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year on Cabinet, 1 Year on Jets	
Audio System (Optional)	N/A	

*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-315

Message Selector/Air Control Diagram

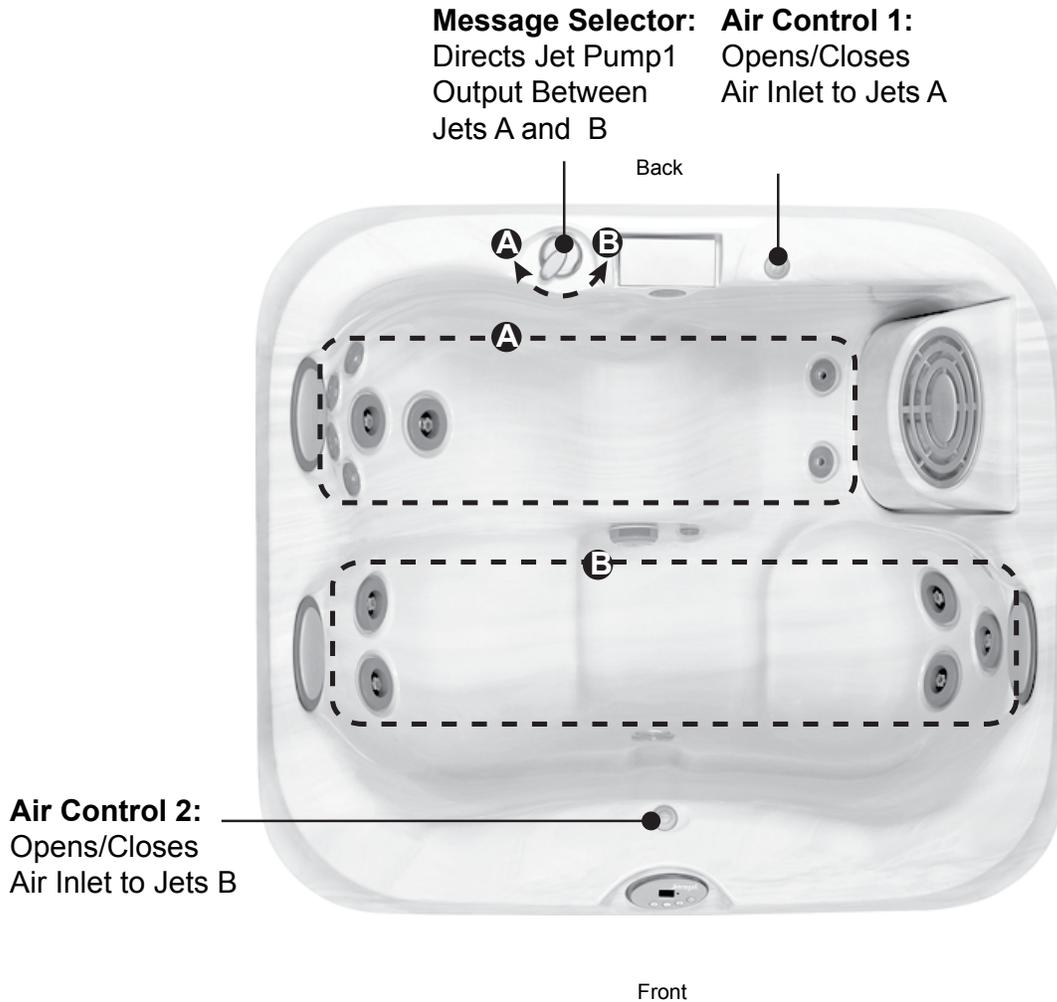

Spa Operation Subject to Change without Notice

Seat Depths

A = 26.50" (67.3 cm)

D = 28.00" (71.1 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat.

B = 28.00" (71.1 cm)

E = 27.75" (70.5 cm)

C = 27.00" (68.6 cm)



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-280


Seating Capacity	6-7 Adults	
Dimensions	91" x 91" x 37" (231 cm x 231 cm x 94 cm); For Complete Dimensions, See page 39	
Dry Weight	813 lbs (369 kg)	
Filled Weight	5,311 lbs (2,409 kg)	
Water Capacity	539 US gallons (2,041 Liters)	
Electronic Controls	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles	
Pump 1	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 48 Frame	
Export (50 Hz):	2-Speed, 2.0 HP continuous	
Pump 2	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 48 Frame	
Export (50 Hz):	1-Speed, 2.0 HP continuous	
Circulation Pump	Yes, 24-hour (Optional, Factory installed)	
Total Jets	44	
DL Jets (Classic Euro)	16, Optional stainless steel escutcheons (Factory installed)	
DST Jets (Classic Whirl)	1, Optional stainless steel escutcheons (Factory installed)	
DVX Jets (Classic Luxury)	13, Optional stainless steel escutcheons (Factory installed)	
DX Jets (Classic Euro Dir)	8, Optional stainless steel escutcheons (Factory installed)	
DXL Jets (Classic Mini)	6, Optional stainless steel escutcheons (Factory installed)	
Message Selectors	1	
Air Controls	4	
Total Foot Jets Therapy	3	
Water Management System	One 95 ft ² filter cartridge on jets pump 1, optional CD ozone generator ready (Factory installed ozone injector)	
Lighting	Underwater with two colored lenses; optional (factory installed) classic lighting package of 22 perimeter LED lights, 3 waterfall lights and footwell multi-color LED light	
Synthetic Cabinet Colors	Harvest Wheat, Autumn Red, Silverwood, or Roasted Chestnut	
Acrylic Colors	Platinum, Sand, Sahara, Desert Sand, Cobalt, Opal, Silver Pearl, or Graphite	
Headrests	4	
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A Export (50 Hz): 230-240 VAC@20A, 30A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.	
Warranty*	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years for Plumbing Component Leaks, 3 Years Equipment and Controls; 1 Year Cabinets, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 1 Years Plumbing Component Leaks, 1 Years Equipment and Controls, 1 Year on Cabinet, 1 Year on Jets	
Audio System (Optional)	AM/FM/CD stereo receiver with four speakers	

*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-280

Message Selector/Air Control Diagram

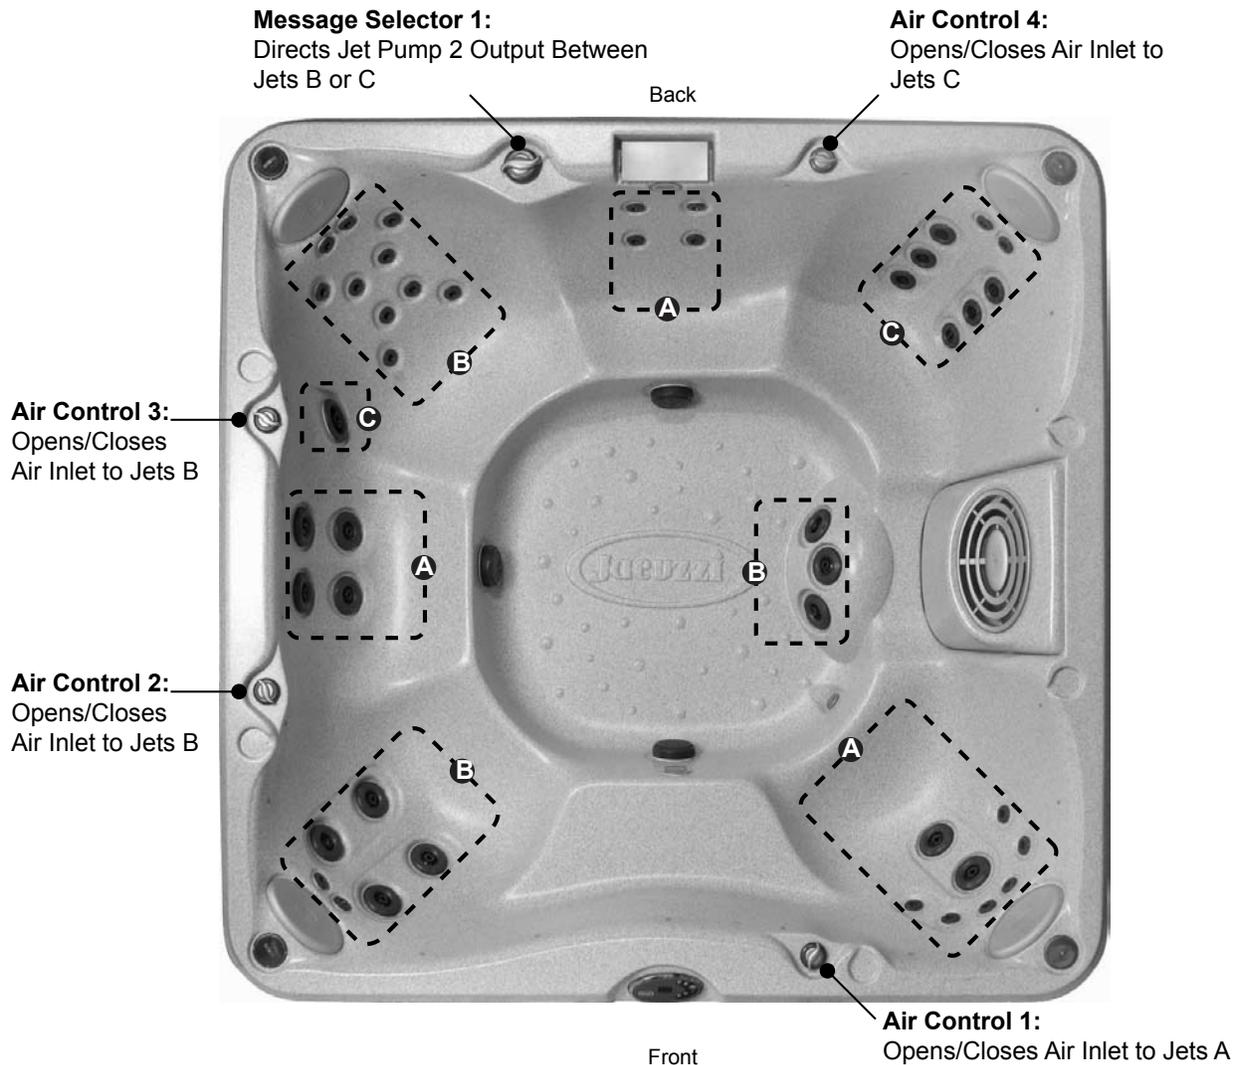

Jets A Powered by Jet Pump 1
Jets B and C Powered by Jet Pump 2

Spa Operation Subject to Change without Notice

Seat Depths

A = 28.0" (71.1 cm)
B = 24.0" (60.6 cm)
C = 26.5" (67.3 cm)
D = 24.5" (62.2 cm)

E = 16.0" (40.6 cm)
F = 25.5" (64.8 cm)
G = 23.0" (58.4 cm)
H = 30.0" (76.2 cm)

Listed dimensions
represent distance from top
of acrylic to lowest point in
seat.



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-270

Seating Capacity	6 Adults	
Dimensions	91" x 91" x 37" (231 cm x 231 cm x 94 cm); For Complete Dimensions, See page 39	
Dry Weight	813 lbs (369 kg)	
Filled Weight	5,236 lbs (2,375 kg)	
Water Capacity	530 US gallons (2,006 Liters)	
Electronic Controls	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles	
Pump 1	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 48 Frame	
Export (50 Hz):	2-Speed, 2.0 HP continuous	
Pump 2	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 48 Frame	
Export (50 Hz):	1-Speed, 2.0 HP continuous	
Circulation Pump	Yes, 24-hour (Optional, Factory installed)	
Total Jets	42	
DL Jets (Classic Euro)	14, Optional stainless steel escutcheons (Factory installed)	
DST Jets (Classic Whirl)	1, Optional stainless steel escutcheons (Factory installed)	
DV Jets (Classic Pulsator)	4, Optional stainless steel escutcheons (Factory installed)	
DVX Jets (Classic Luxury)	10, Optional stainless steel escutcheons (Factory installed)	
DX Jets (Classic Euro Dir)	6, Optional stainless steel escutcheons (Factory installed)	
DXL Jets (Classic Mini)	7, Optional stainless steel escutcheons (Factory installed)	
Message Selectors	1	
Air Controls	3	
Total Foot Jets Therapy	2	
Water Management System	One 95 ft ² filter cartridge on jets pump 1, optional CD ozone generator ready (Factory installed ozone injector)	
Lighting	Underwater with two colored lenses; optional (factory installed) classic lighting package of 22 perimeter LED lights, 3 waterfall lights and footwell multi-color LED light	
Synthetic Cabinet Colors	Harvest Wheat, Autumn Red, Silverwood, or Roasted Chestnut	
Acrylic Colors	Platinum, Sand, Sahara, Desert Sand, Cobalt, Opal, Silver Pearl, or Graphite	
Headrests	3	
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A Export (50 Hz): 230-240 VAC@20A, 30A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.	
Warranty*	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years for Plumbing Component Leaks, 3 Years Equipment and Controls; 1 Year Cabinets, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 1 Years Plumbing Component Leaks, 1 Years Equipment and Controls, 1 Year on Cabinet, 1 Year on Jets	
Audio System (Optional)	AM/FM/CD stereo receiver with four speakers	


*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-270

Message Selector/Air Control Diagram

Message Selector 1:
Directs Jet Pump 2 Output Between
Jets B or C

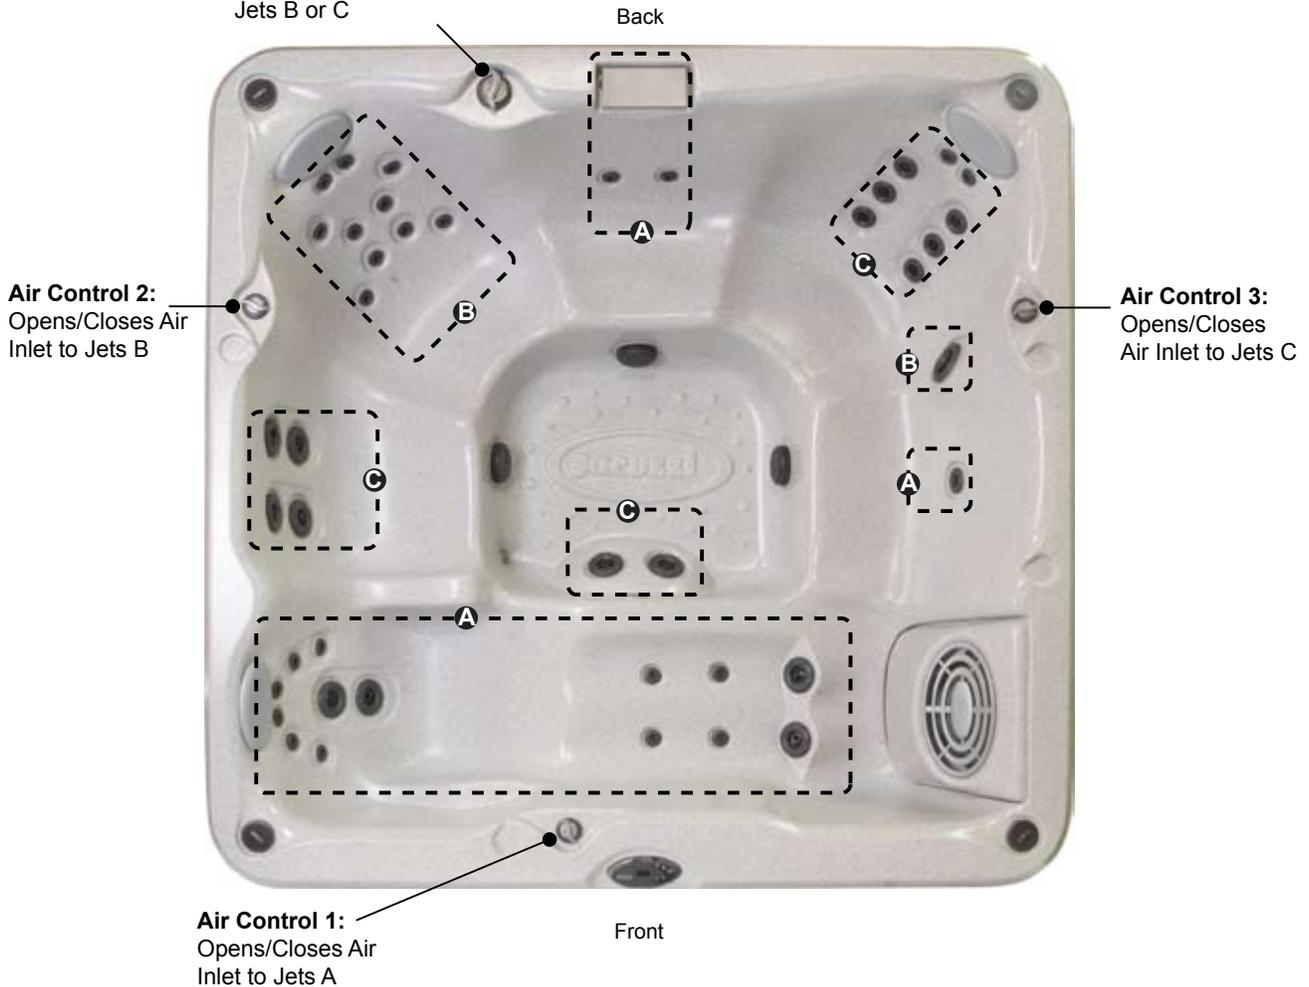

Jets A Powered by Jet Pump 1
Jets B and C Powered by Jet Pump 2


Spa Operation Subject to Change without Notice

Seat Depths

A = 27.5" (69.9 cm)
B = 23.5" (59.9 cm)
C = 25.0" (63.5 cm)
D = 22.5" (57.2 cm)

E = 26.0" (66.0 cm)
F = 25.0" (63.5 cm)
G = 33.0" (83.8 cm)

Listed dimensions
represent distance from top
of acrylic to lowest point in
seat.

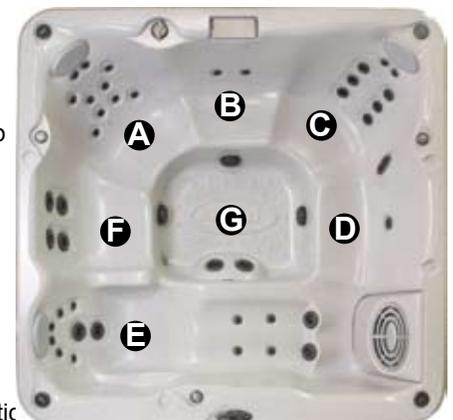

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-230

Seating Capacity	5 Adults	
Dimensions	84" x 84" x 36" (213.5 cm x 213.5 cm x 91.5 cm);	
	For complete dimensions, see page 39	
Dry Weight	728 lbs (330 kg)	
Filled Weight	4,316 lbs (1,958 kg)	
Water Capacity	430 US gallons (1,628 Liters)	
Electronic Controls	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles	
Pump 1	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 48 Frame	
	Export (50 Hz): 2-Speed, 3.0 HP brake, 2.0 HP continuous	
Circulation Pump	Yes, 24-hour (Optional, Factory installed)	
Total Jets	25	
DVX Jets (Classic Luxury)	7, Optional stainless steel escutcheons (Factory installed)	
DXL Jets (Classic Mini)	4, Optional stainless steel escutcheons (Factory installed)	
DV Jets (Classic Pulsator)	2, Optional stainless steel escutcheons (Factory installed)	
DL Jets (Classic Euro)	12, Optional stainless steel escutcheons (Factory installed)	
Message Selectors	1	
Air Controls	3	
Total Foot Jets	2	
Water Management System	One 95 ft ² filter cartridge, optional CD ozone generator ready (Factory installed ozone injector)	
Lighting	Underwater with two colored lenses; optional (factory installed) classic lighting package of 22 perimeter LED lights, 3 waterfall lights and footwell multi-color LED light	
Synthetic Cabinet Colors	Harvest Wheat, Autumn Red, Silverwood, or Roasted Chestnut	
Acrylic Colors	Platinum, Sand, Sahara, Desert Sand, Cobalt, Silver Pearl, Opal or Graphite	
Headrests	3	
Electrical Requirements	North America (60 Hz): 240 VAC @ 40A or 50A Export (50 Hz): 230 VAC @ 20A or 30A; or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.	
Warranty*	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years for Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets; Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 1 Years for Plumbing Component Leaks, 1 Year Equipment and Controls, 1 Year Cabinet, 1 Year Jets	
Audio System (Optional)	AM/FM/CD Stereo receiver with four speakers	




*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-230

Message Selector/Air Control Diagram

Diverter:
Diverts Water
Between Areas
1 and 2

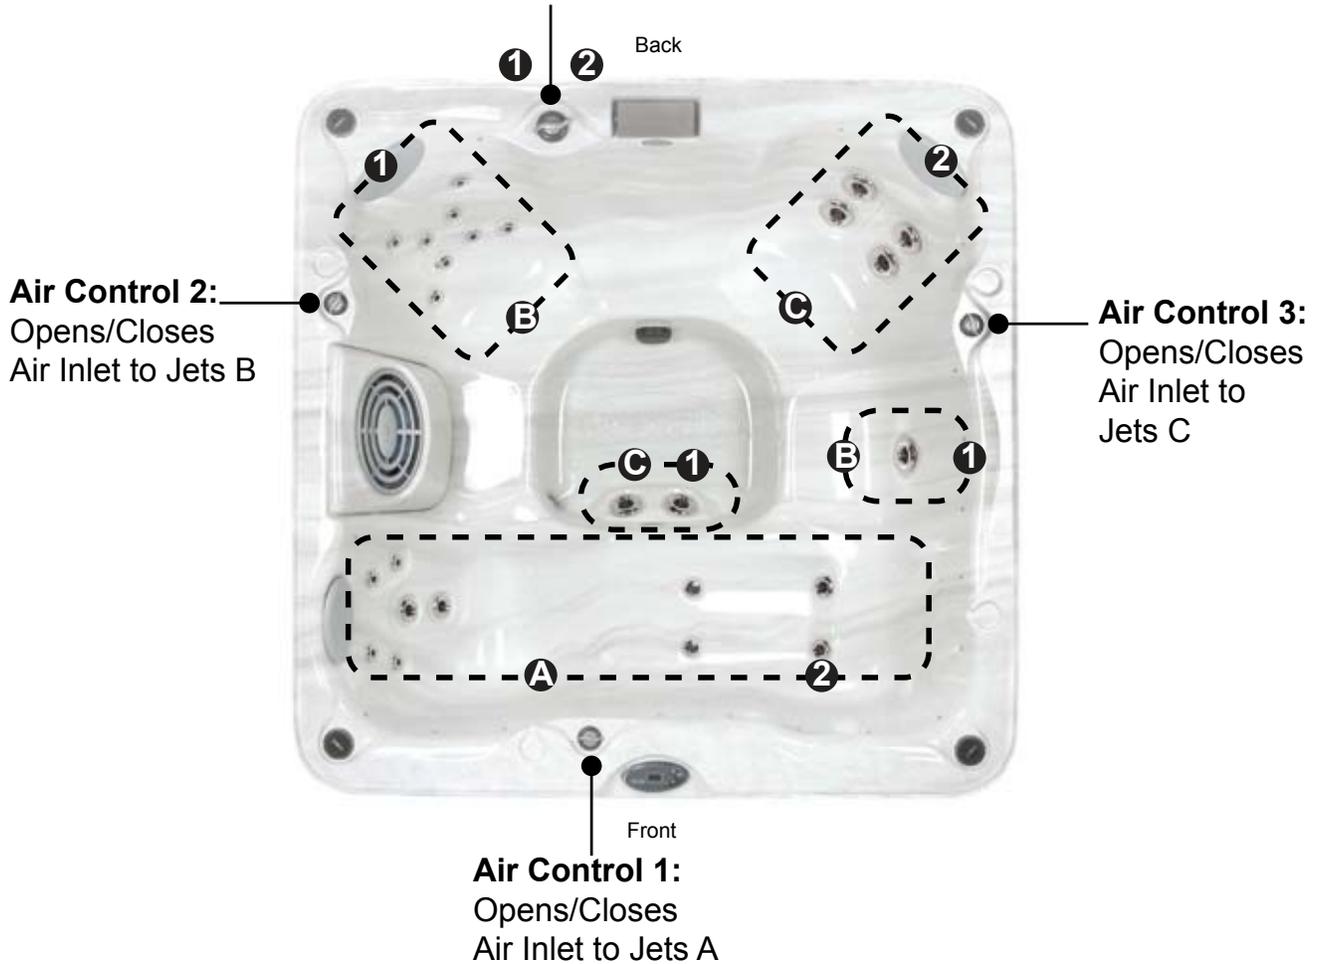

Waterfall is always on when pump is activated.


Spa Operation Subject to Change without Notice

Seat Depths

A = 26.5" (67.3 cm)
B = 24.0" (60.9 cm)
C = 25.5" (64.8 cm)

D = 26.25" (66.7 cm)
E = 33.5" (85.1 cm)

Listed dimensions
represent distance from top
of acrylic to lowest point in
seat.

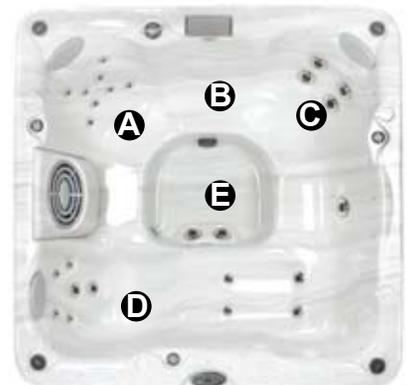

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-210

Seating Capacity	4 Adults	
Dimensions	78" Round x 36" Deep (198 cm Round x 91.5 cm);	
	For Complete Dimensions, See page 39	
Dry Weight	500 lbs (227 kg)	
Filled Weight	2,987 lbs (1,355 kg)	
Water Capacity	298 US gallons (1,128 Liters)	
Electronic Controls	Solid state electronic controls with LED read-out, programmable temperature, filtration, and heat cycles	
Pump 1	North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous	
	Export (50 Hz): 2-Speed, 2.0 HP continuous	
Total Jets	19	
DVX Jets (Classic Luxury)	4, Optional stainless steel escutcheons (Factory installed)	
DXL Jets (Classic Mini)	10, Optional stainless steel escutcheons (Factory installed)	
DX Jets (Classic Euro Dir)	4, Optional stainless steel escutcheons (Factory installed)	
Divert-A-Jet	1	
Air Controls	3	
Total Foot Jets Therapy	2	
Water Management System	One 50 ft ² filter cartridge; optional CD ozone generator ready (Factory installed ozone injector)	
Lighting	Underwater with two colored lenses; Optional underwater plug-in multi-color LED light	
Synthetic Cabinet Colors	Harvest Wheat, Autumn Red, Silverwood, or Roasted Chestnut	
Acrylic Colors	Platinum, Sand, Sahara, Desert Sand, Cobalt, Opal, Silver Pearl or Graphite	
Electrical Requirements:	North America (60 Hz): 120 VAC@15A or 240 VAC@30A or 40A, Export (50 Hz): 230 VAC@20A or 30A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.	
Warranty*	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years for Plumbing Component Leaks, 3 Years Equipment and Controls; 1 Year Cabinets, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 1 Years Plumbing Component Leaks, 1 Years Equipment and Controls, 1 Year on Cabinet, 1 Year on Jets	
Audio System (Optional)	N/A	




*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-210

Message Selector/Air Control Diagram

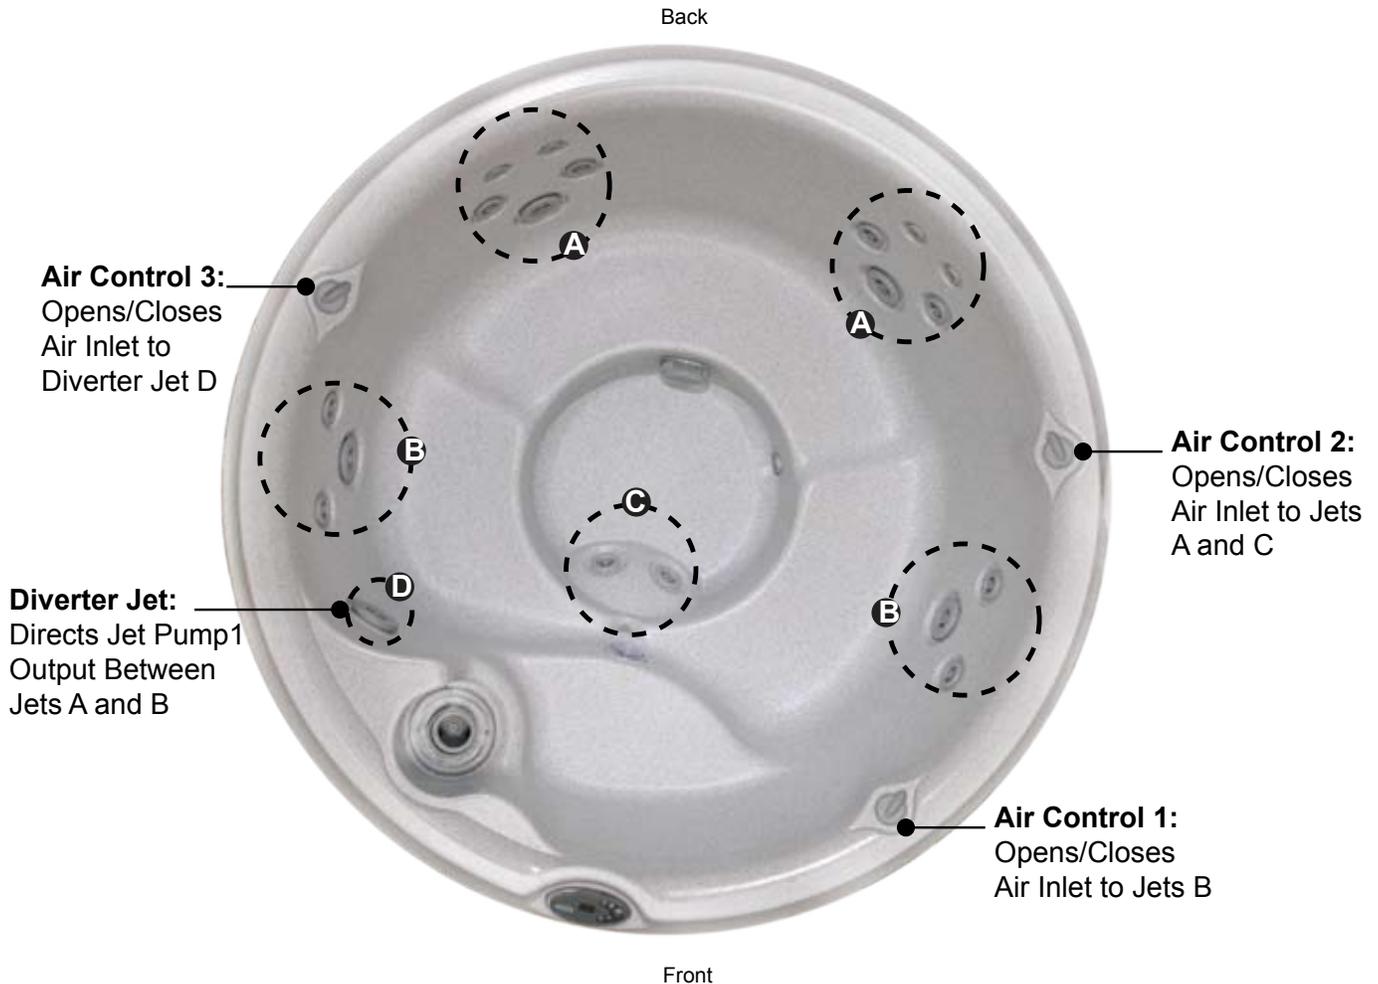

Jets C are Powered Continuously when Jets Pump 1 is running

Spa Operation Subject to Change without Notice

Seat Depths

A = 27.0" (68.6 cm)

D = 24.5" (62.2 cm)

B = 24.5" (62.2 cm)

E = 34.0" (86.4 cm)

C = 16.5" (41.9 cm)

Listed Dimensions
Represent Distance
from Top of Acrylic
to Lowest Point in
Seat.




Dimensions/Specifications are Subject to Change Without Notice

Complete Dimensions-All 400 Series Models


Spa Models	DIMENSIONS A-F (All measurements are an approximate)					
	A	B	C	D	E	F
J-480	94" (239 cm)	94" (239 cm)	18.50" (46.99 cm)	16.50" (41.91 cm)	32.75" (83.2 cm)	94" (239 cm)
J-470	91" (231 cm)	91" (231 cm)	18.50" (46.99 cm)	15.75" (40.0 cm)	24.25" (61.6 cm)	91" (239 cm)
J-465	88" (224 cm)	88" (224 cm)	18.50" (46.99 cm)	15.50" (39.37 cm)	28" (71.1 cm)	88" (224 cm)
J-460	88" (224 cm)	77" (196 cm)	13.50" (34.29 cm)	14.25" (39.19 cm)	24.5" (62.2 cm)	88" (224 cm)
	DIMENSIONS G-L (All measurements are an approximate)					
	G	H	I	J	K	L
J-480	32.5" (82.6 cm)	39" (99.0 cm)	44" (112 cm)	≈ 8.25" (21.0)	≈ 720.75" (1830.7 cm)	≈ 120.25" (305.4 cm)
J-470	32.5" (82.6 cm)	39" (99.0 cm)	44" (112 cm)	≈ 8.50" (21.6 cm)	≈ 900.50" (2287.3 cm)	≈ 146.625" (372.4 cm)
J-465	32.5" (82.6 cm)	39" (99.0 cm)	44" (112 cm)	≈ 8.375" (21.3 cm)	≈ 800.44" (2033.1 cm)	≈ 225.44" (572.6 cm)
J-460	27.25" (69.2 cm)	34" (86.4 cm)	34" (86.4 cm)	≈ 9" (22.9 cm)	≈ 384.75" (977.3 cm)	≈ 144.375" (366.7 cm)
	DIMENSIONS M-O (All measurements are an approximate)				 IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.	
	M	N	O	P		
J-480	≈ 19.875" (50.5 cm)	≈ 491.25" (1247.8 cm)	Front Left	14" (35.6 cm)		
J-470	≈ 19.875" (50.5 cm)	≈ 458.5" (1164.6 cm)	Front Left	14" (35.6 cm)		
J-465	≈ 14.687" (37.3 cm)	≈ 458" (1163.3 cm)	Front Left	18" (45.7 cm)		
J-460	≈ 16.875" (42.9 cm)	≈ 441" (1120.1 cm)	Front Right	15" (38.1 cm)		

- Dimensions Subject to Change Without Notice -

Spa Top View (J-480 Illustrated)

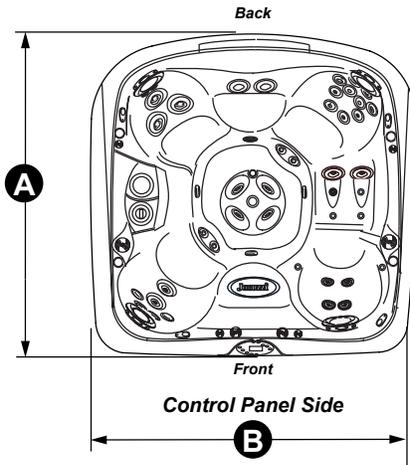


Control Panel Side View (All Models)

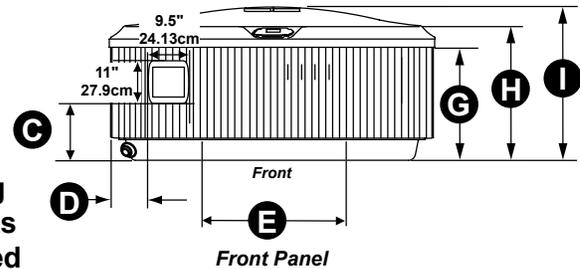


Stone skirting measurements will be updated at a later time.


Side View (J-480 Illustrated)

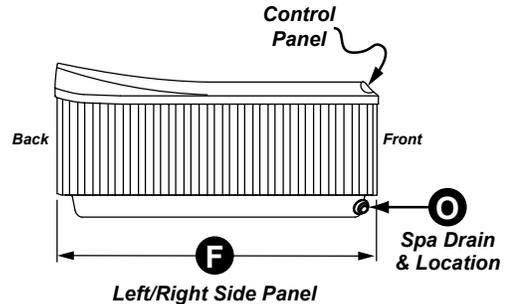

Spa Bottom View (J-480 Illustrated)

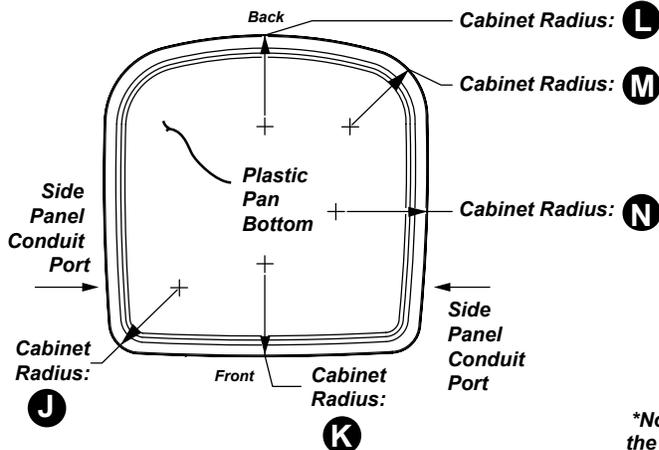

Important Panel Access Details

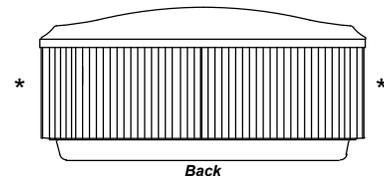

*Note: Side Panels Utilize a Wrap-Around Design which Meets at the Back of the Spa. For Serviceability, Always Allow for Full Side and Back Panel Access.


Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.

Complete Dimensions-All 300 Series Models


Spa Models	DIMENSIONS A-F (All measurements are an approximate)					
	A	B	C	D	E	F
J-375	91" (231.1 cm)	91" (231.1 cm)	16.5" (41.9 cm)	2.75" (7.0 cm)	64.50" (163.8 cm)	64.50" (163.8 cm)
J-365	84" (213.4 cm)					
J-355		84" (213.4 cm)				
J-345			76" (193.0 cm)	N/A	57.50" (146.1 cm)	57.50" (146.1 cm)
J-335		57.25" (145.4 cm)			57.25" (145.4 cm)	
J-325	50.25" (127.6 cm)	50.25" (127.6 cm)				
J-315	66" (167.6 cm)				49.63" (126.1 cm)	49.63" (126.1 cm)
DIMENSIONS G-L (All measurements are an approximate)						
	G	H	I	J	K	L
J-375	31.75" (80.6 cm)	38" (96.5 cm)	57.50" (146.1 cm)	Front Left	 <p>IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.</p>	
J-365				Front Left		
J-355				Front Left		
J-345	29.50" (79.3 cm)	36" (91.4 cm)	57.25" (145.4 cm)	Front Right		
J-335	30.00" (76.2 cm)			Front Left		
J-325	28.00" (71.1 cm)	34" (86.4 cm)	57.38" (145.7 cm)	Front Right		
J-315	26.00" (66.0 cm)	32" (81.3 cm)	39.63" (100.7 cm)	Front Left		

- Dimensions Subject to Change Without Notice -


Spa Top View (J-365 Illustrated)

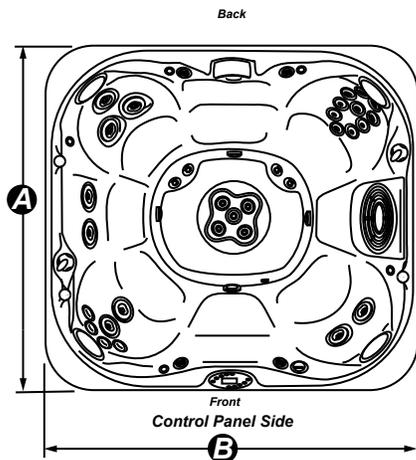


Control Panel Side View (All Models)

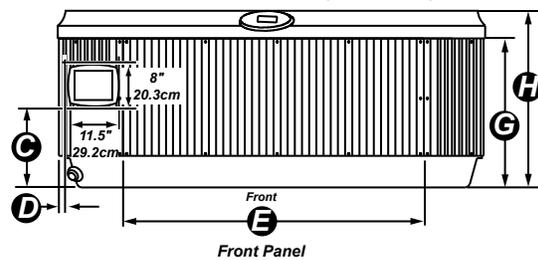


Rear Side View (All Models)

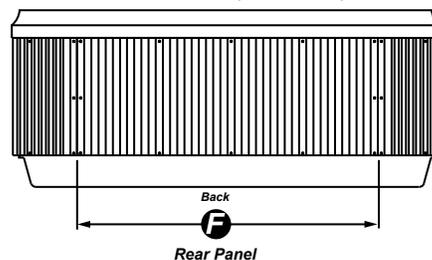

Spa Bottom View

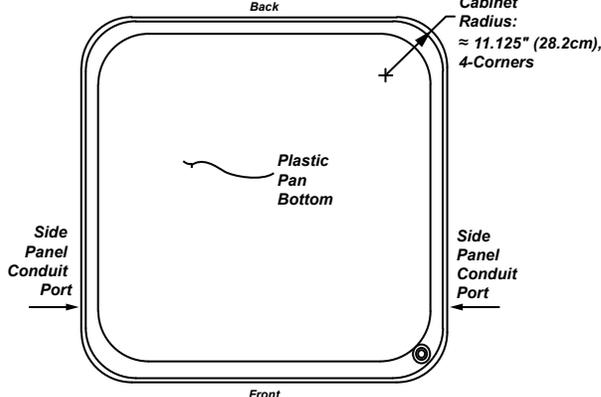

Left / Right Side View (All Models)

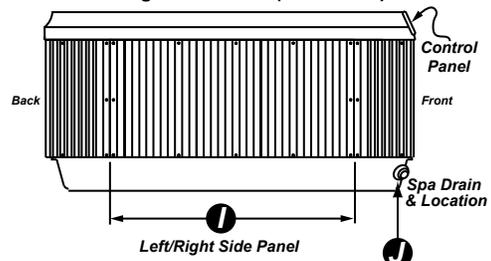

Complete Dimensions-All 200 Series Models


Spa Models	DIMENSIONS A-F (All measurements are an approximate)					
	A	B	C	D	E	F
J-210 (Round Spa)	78" (198.1 cm)		77.25" (196.2 cm) Round	30.25" (76.8 cm)	36" (91.5 cm)	77.25" (196.2 cm) Round
J-230 (Square Spa)	84" (213.5 cm)	84" (213.5 cm)	83.25" (211.4 cm)			83.25" (211.4 cm)
J-270	91" (231.1 cm)	91" (231.1 cm)	90.25" (229.2 cm)	31.25" (79.4 cm)	37" (94.0 cm)	90.25" (229.2 cm)
J-280	91" (231.1 cm)	91" (231.1 cm)	90.25" (229.2 cm)	31.25" (79.4 cm)	37" (94.0 cm)	90.25" (229.2 cm)

- Dimensions Subject to Change Without Notice -




IMPORTANT! Always measure each hot tub for exact dimensions **BEFORE** designing its foundation support and/or decking.

Spa Top View (J-230 Illustrated)

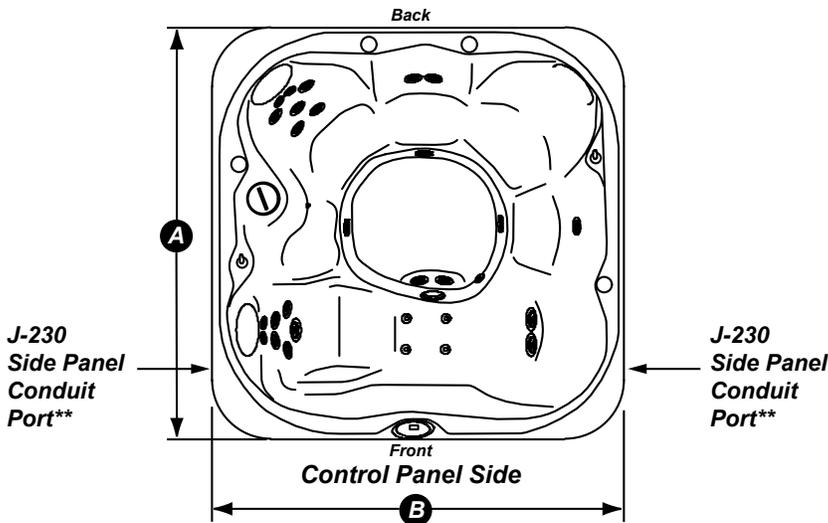

****Single Conduit Port Available on Round J-210 Models at Front Panel Side of Spa.**


Control Panel Side View (All Models)

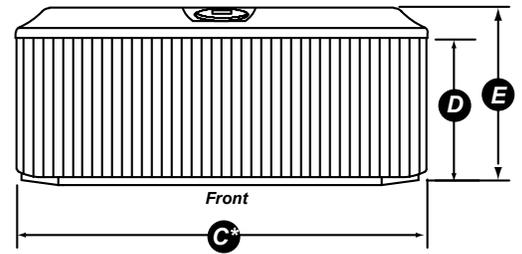


Equipment Access Panel (Spa Drain Hose Located Behind Front Panel)

***Panels C & F: Always Design Surround or Decking to Allow Removal of Entire Side Skirt on All Sides of Spa for Drain/Repair Access.**

Spa Bottom View (J-230 Illustrated)

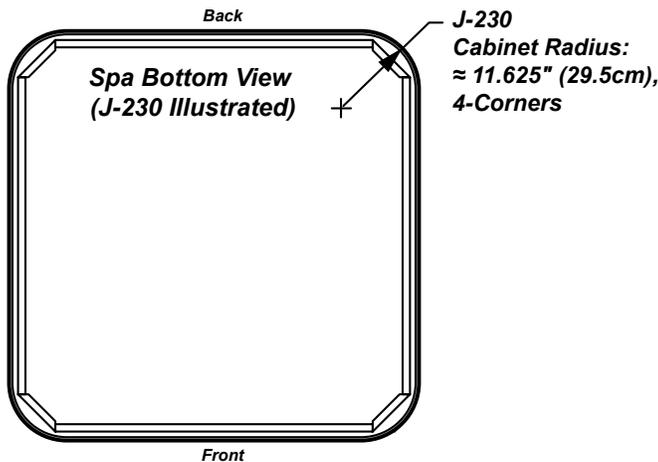

Left/Right Side View (All Models)

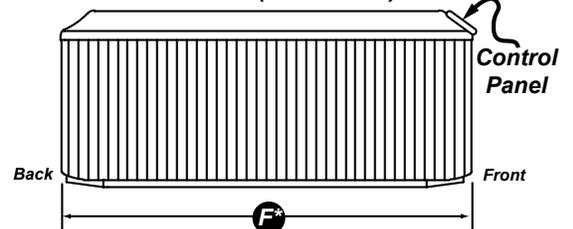

NOTES:

Your Jacuzzi Hot Tub Dealer is:



www.jacuzzipartners.com
14525 Monte Vista Ave.
Chino, CA 91710

(10/09) Rev-A
Printed in U.S.A.
© 2009 Jacuzzi Hot Tubs